

DVC 315-S 1x230V



Vertical blow out roof fan model DVC, **manufactory ST-Fans.**

Backward curved blades made of polyamide PA 6 for type 190 to 225. From type 315 to 630, the impellers are made of Polypropylene PP and are driven by a high efficiency and energy-efficient EC motor.

These roof fans have an excellent noise level and are maintenance-free and reliable. The maximum temperature of the air to be moved is a maximum of 60 ° C. The base plate is made of galvanized sheet steel.

The rain cover is completely made of seawater resistant aluminum AlMg 3. Sealing tape and mounting material are supplied as standard.

General data:


Max Air flow	2.318	m3/h
Impeller speed	1.571	rpm
Input power	0,167	kW
Voltage (nominal)	1x230/50/60	V/Hz
Input current	1,34	A
Enclosure class, motor	54	IP
Weight	12,2	kg
Sound pressure level ±2*	45	dB(A)

* (at 4 m near the fan with inlet and outlet ducted, in free field)


Options:

Flat roof socket	DOK 310/311/315
Silencer for use below roof	OGD 310/311/315
Silencer for use above roof	BGD 310/311/315
Gravity Louvre shutter	SJ 310/311/315
Roof duct	DDR 310/311/315
Gravity Back draft damper	VKS 310/311/315
Roof socket for inclined roof	DS 310/311/315
Roof socket for inclined roof / lead slab	DSL 310/311/315
Speed control	MTP 10


Assembly examples

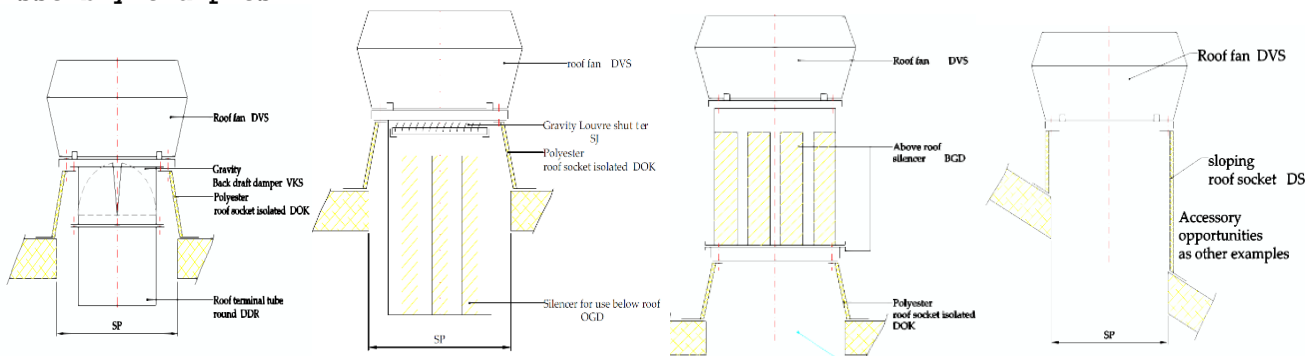

Curve:

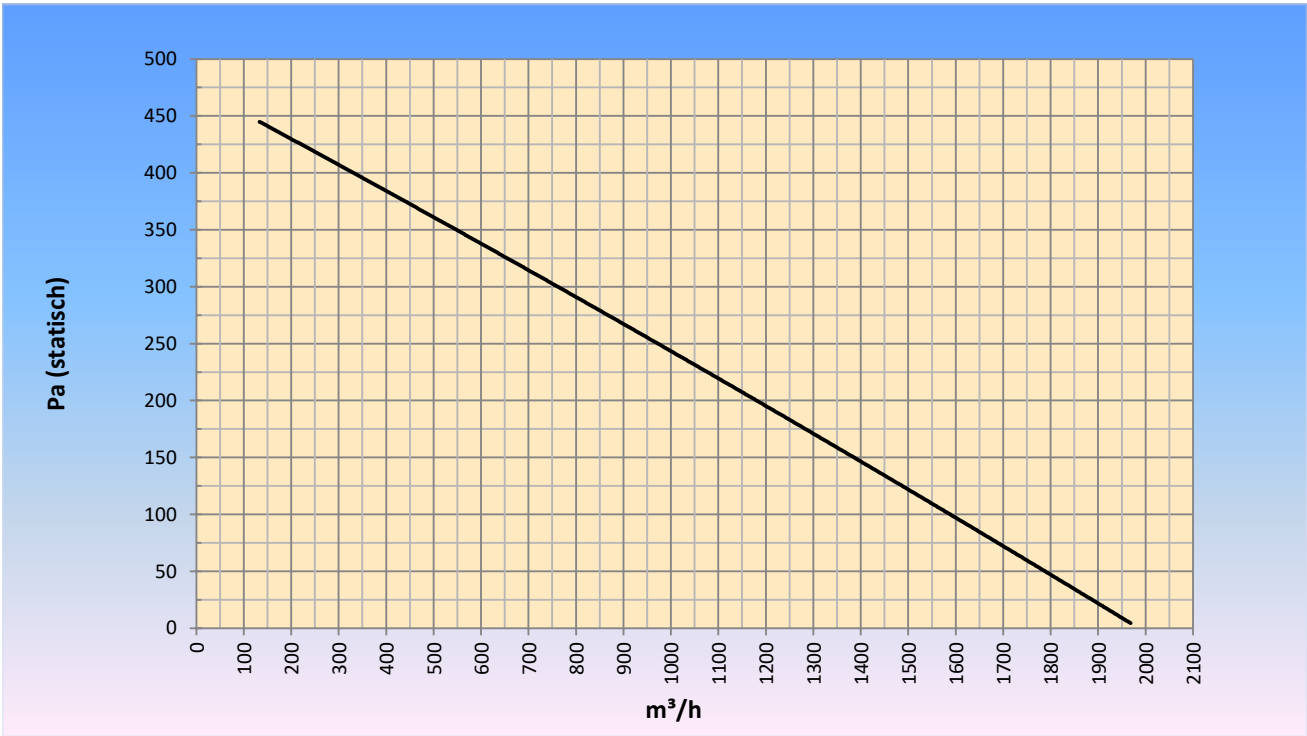

Dimensions:

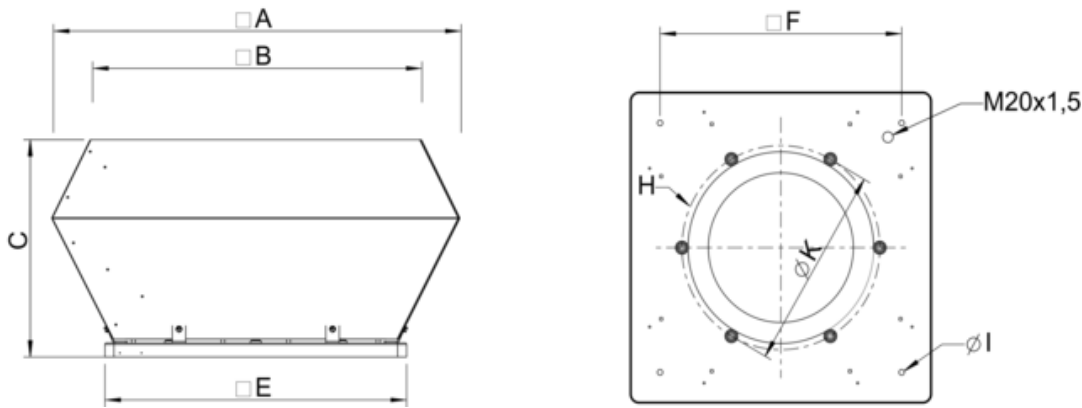

□A	□B	C	□E	□F	H	øK	øI
560	470	330	435	330	6xM6	285	10(4x)