



Vertical Blowing Roof Fan Model DVN-EC

The DVN-EC roof fan features 3D-profiled backward-curved blades, driven by a high-efficiency and energy-saving EC motor. These fans are ideal for demanding applications such as kitchen extraction, process air systems, and industrial ovens, and can operate continuously at temperatures up to 120°C.

They move large volumes of air at medium pressure without producing excessive noise. The casing, made of seawater-resistant ALMg 3 aluminum with a galvanized steel inner frame, ensures durability and wear resistance. The combination of the casing and motor construction minimizes maintenance and allows for long, uninterrupted operation.

The fans are designed for high performance, minimal power consumption, and maximum efficiency. An adhesive sealing strip and mounting materials are included as standard. The work switch is pre-installed.

General data

Max. airflow	9.965	m ³ /h
Impeller speed	1.500	rpm
Input power	1,934	kW
Voltage (nominal)	3x400/50	V/Hz
Input current	2,93	A
Enclosure class, motor	55	IP
Weight	67,5	KG
Max. Med. Temp.	120	°C
Sound pressure level ±2*	71	dB(A)


*(at 4m near the fan with inlet
and outlet ducted, in free field)*

Options

Flat roof socket
 Silencer for use below roof
 Silencer for use above roof
 Gravity Louvre shutter
 Roof duct
 Gravity Back draft damper
 Roof socket for inclined roof
 Roof socket for inclined roof / lead slab
 Speed control


DVN 500EC REV7 ST

Graphe DVN 500EC REV7 ST @ 1500rpm @ 15°C @ 0m

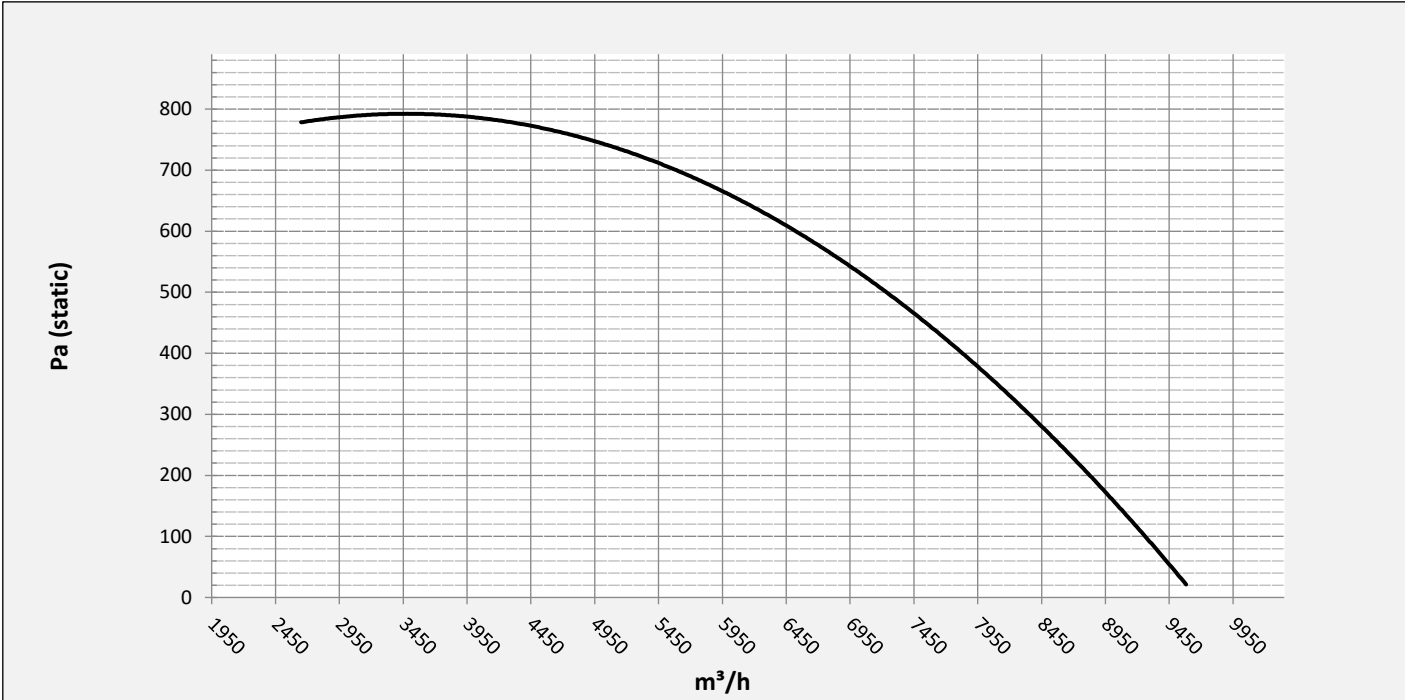


Assembly examples


Roof fan + VKS + DOK + DDR

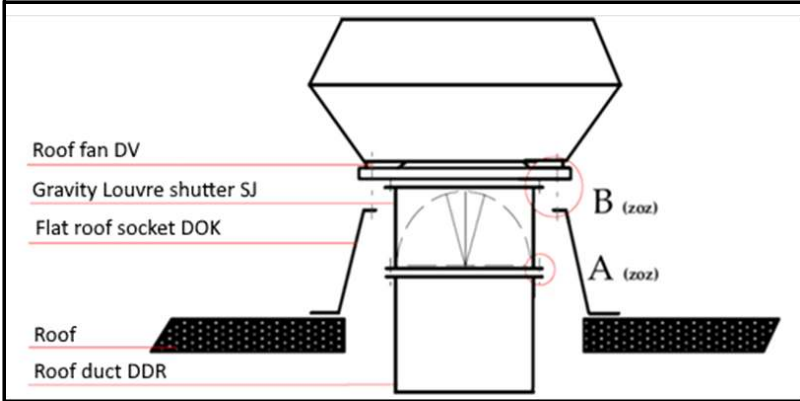


Roof fan + BGD + DOK

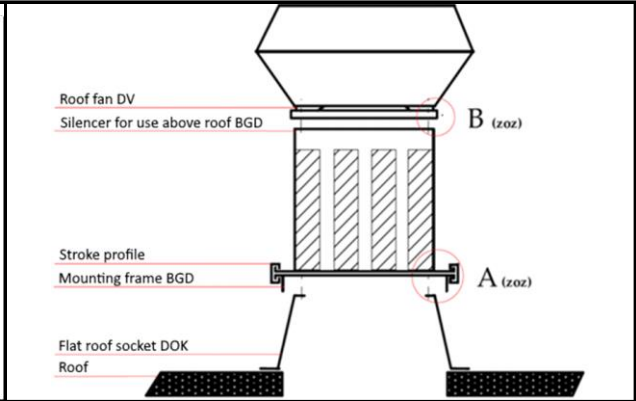

Roof fan + SJ + DOK + OGD


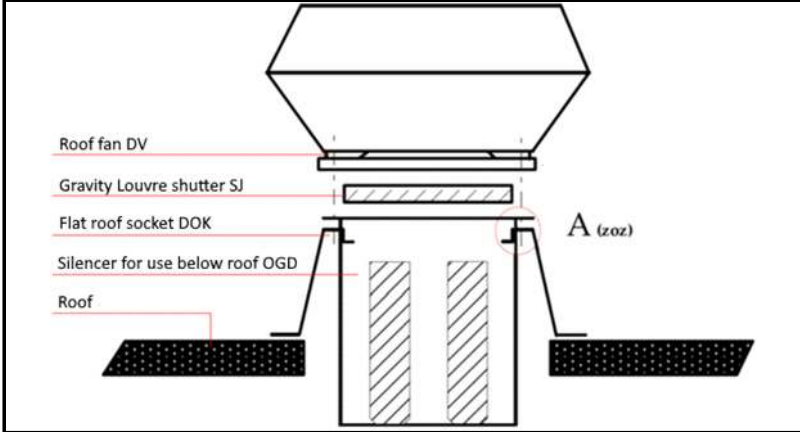


Roof fan + SJ + DS + OGD

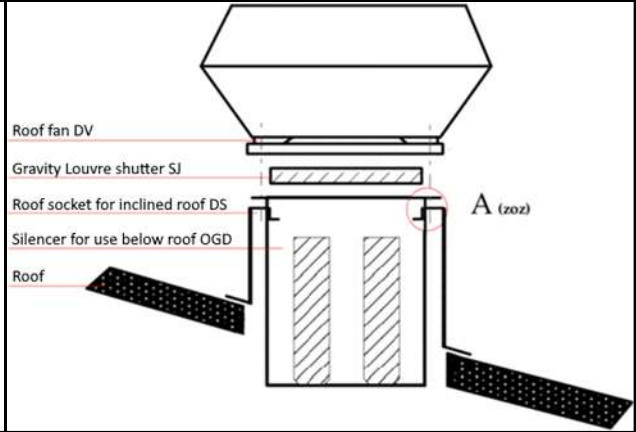


DVN 500EC REV7 ST

Dimensions DVN 500EC REV7 ST

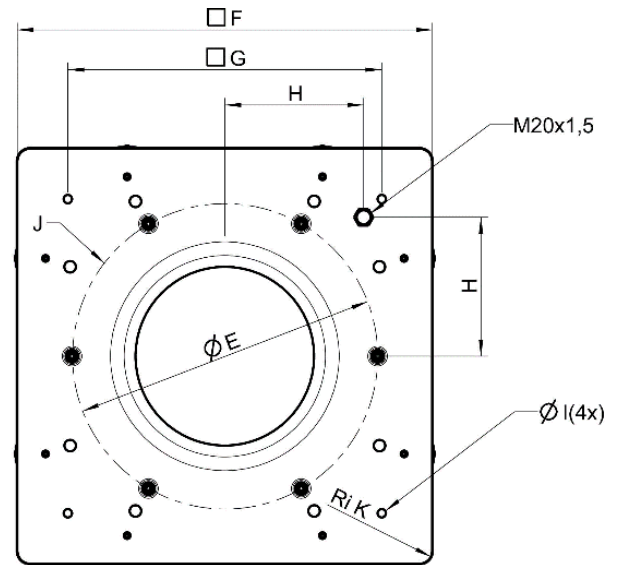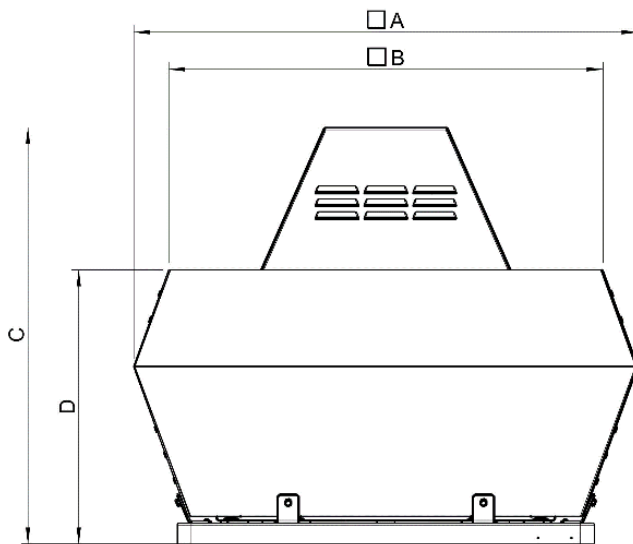

A	B	C	ϕD	E	F	G	H	ϕI	J	K	L	M
900	730	675	465	438	665	535	237	12 (4x)	$\phi 9$ (6)	--	--	--




Wiring

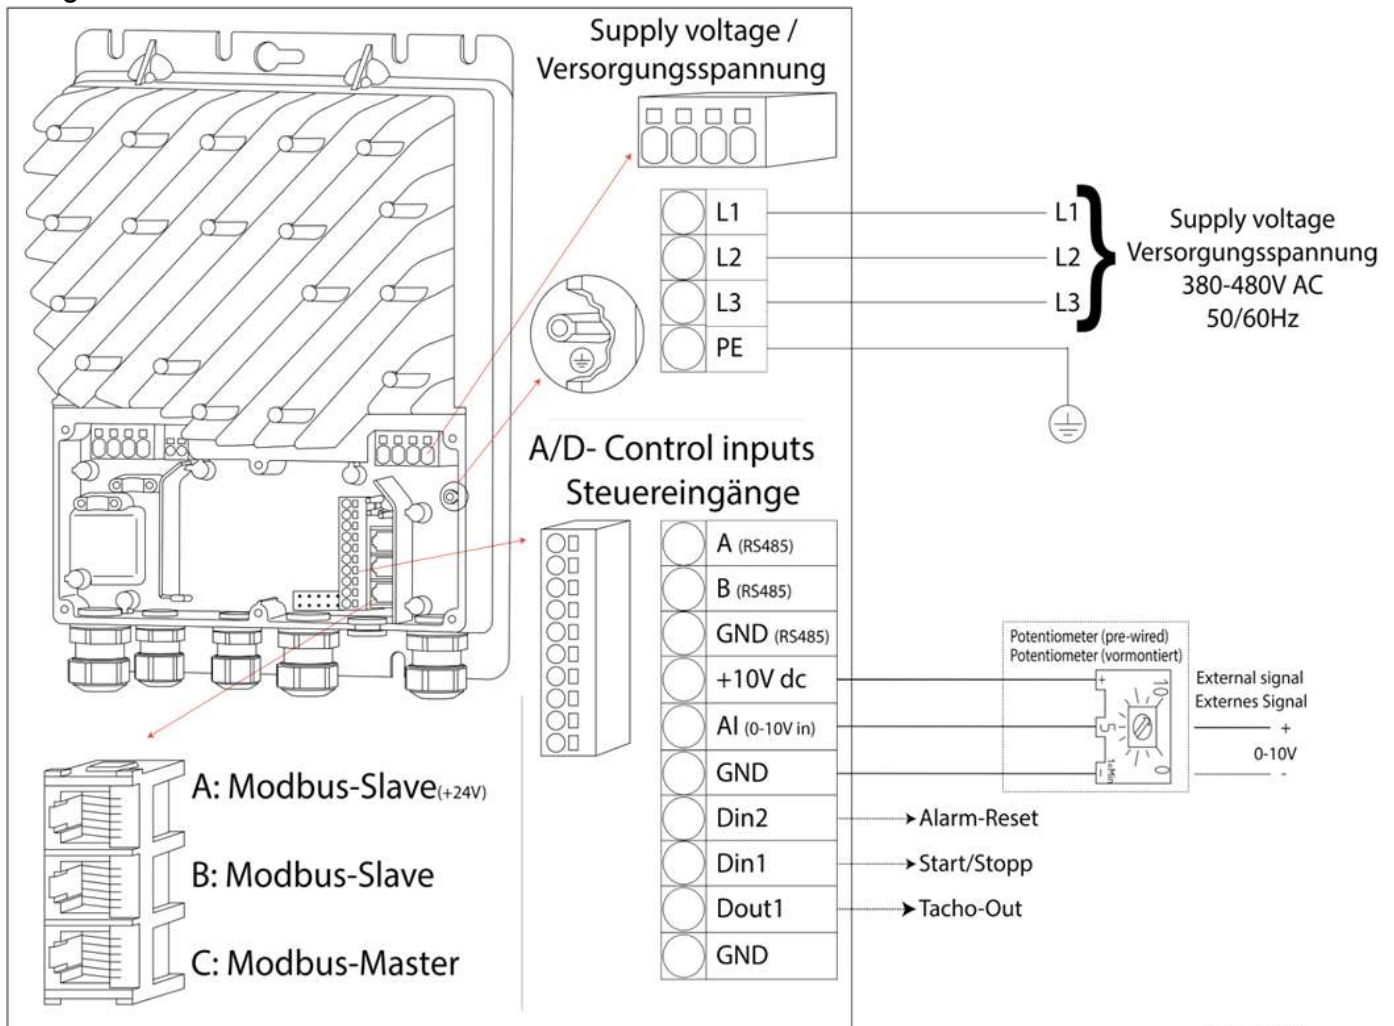

455845/003

DVN 500EC REV7 ST

Accessories for DVN 500EC REV7 ST

		
VKS 450/500 + DDR 355-500	OGD 450/500 + SJ 450/500	VKS 450/500
		
DOK 450/500	OGD 450/500	BGD 450/500
		
DDR 355-500	DS 450/500	DSL 450/500
		
MTP 10		