

SC431MF0.85T-IE2 - SC431MF1.1T-IE2




Ook leverbaar in ATEX uitvoering
Also available in ATEX version



De constructie van de ringventilatoren is gebaseerd op het principe van de zijkanalen. De ventilatoren kunnen zowel als afzuig- of als compressieventilator werken en zijn ontworpen voor continu gebruik. Het apparaat wordt direct op de motoras gemonteerd. Alle draaiende delen zijn dynamisch uitgebalanceerd om absolute afwezigheid van trillingen te garanderen. Volledig gegoten aluminium constructie voor maximale stevigheid en gebruiksgemak.


Construction of the ring blower fans is based on the lateral ducts principle. The blowers can operate as either exhaust or compression fans and are designed for continuous service. The device is assembled directly on the motor shaft. All the rotating parts are dynamically balanced to ensure absolute absence of vibration. Full die-cast aluminium construction for maximum sturdiness and ease of handling.

Curve n.	Model n.	Frequency (Hz)	Output power (kW)	Voltage (V)	Rated current (A)	Noise dB (A)	Weight (Kg)
1	SC431MF0.85T-IE2	50	0.85	230/400	3.51 Δ/2.03Y	63	15
2	SC431MF0.85T-IE2	60	0.95	260/460	3.33 Δ/1.93Y	64	15
3	SC431MF1.1T-IE2	50	1.1	230/400	5.16 Δ/2.99Y	63	16
4	SC431MF1.1T-IE2	60	1.3	260/460	4.67 Δ/2.70Y	64	16

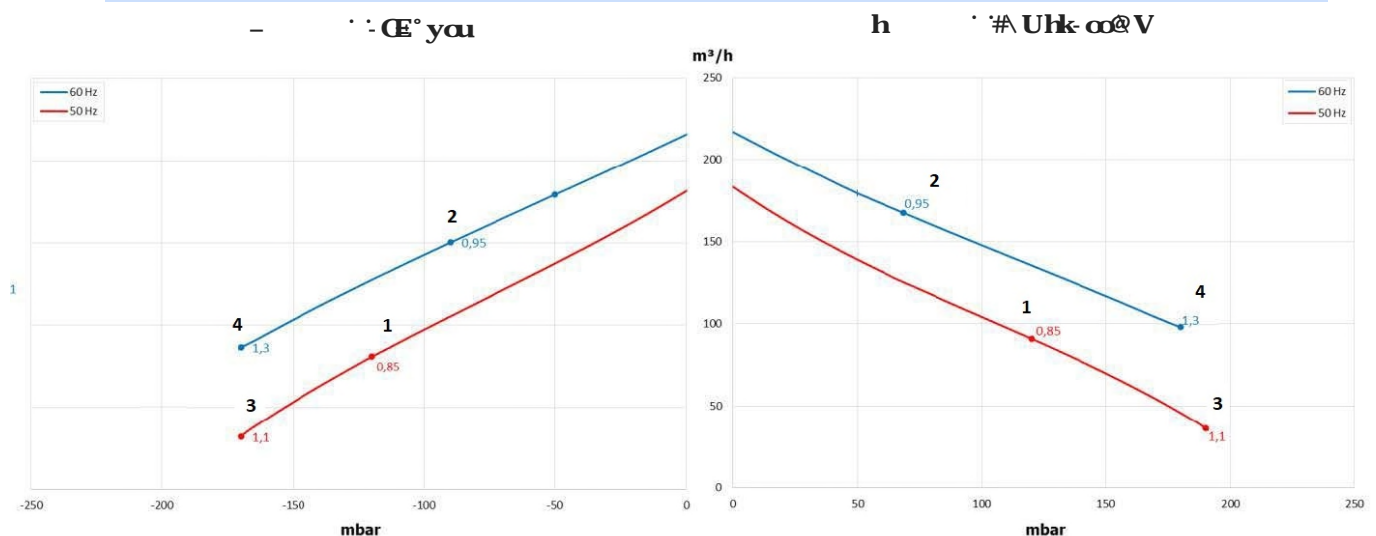

The characteristic data given here refer to the handling of gas with inlet temperature of 15° C, normal density of 1,23 kg/m³ and absolute pressure of 1.013 mbar. Tolerance of ±10%. The data may change without any notification.

Dimensions = mm

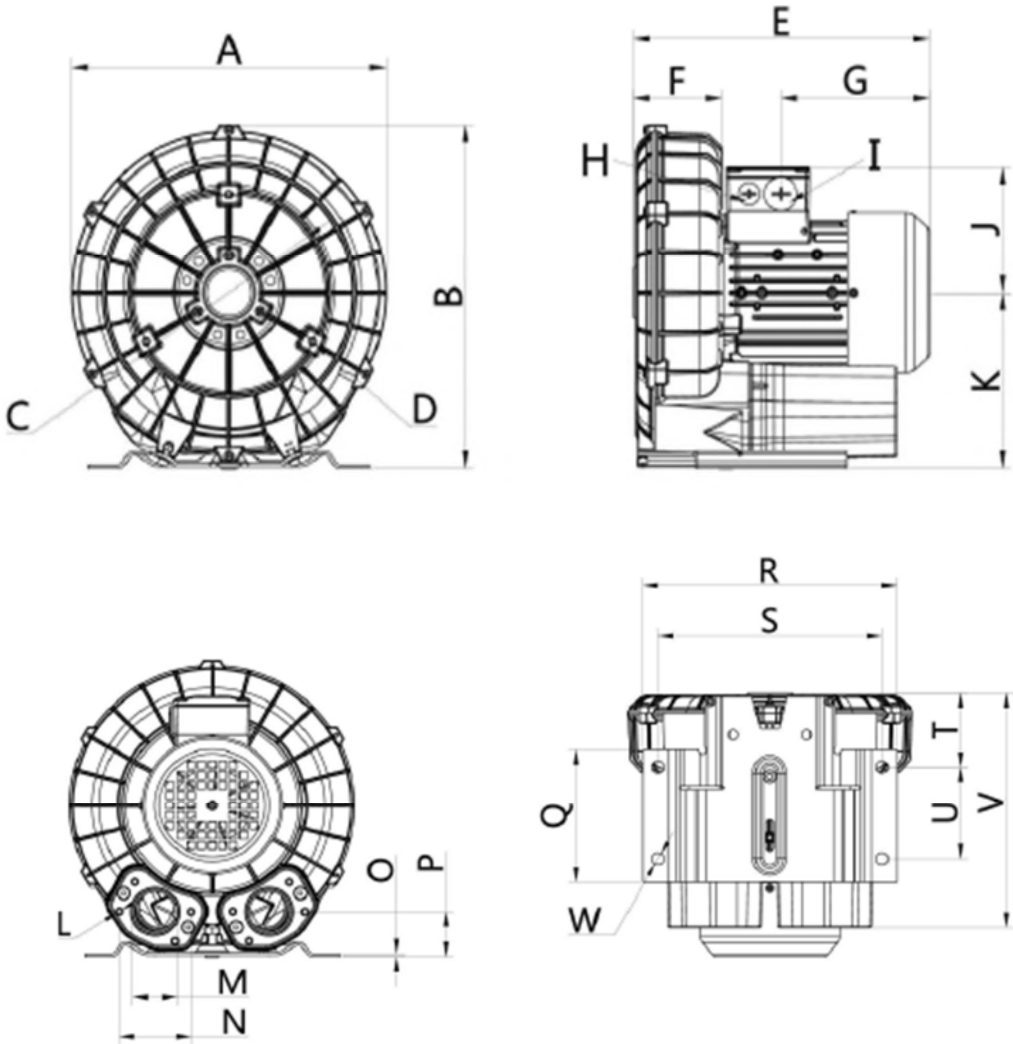

Model	Phase	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W
SC431MF0,85T	3~	286	302	174	M6X15	284	96	159	M16X1.5	M32X1.5	111	154	M6X17	G1 1/2	72	3	46	136	255	225	90	95	255	12
SC431MF1,1T	3~	286	302	174	M6X15	309	96	159	M16X1.5	M32X1.5	120	154	M6X17	G1 1/2	72	3	46	136	255	225	90	95	255	12