

Technische gegevens


Luchtdebiet [m3/h]	1143
Druk [Pa]	586.8
Druktype	Psta
Voeding	all
Dichtheid [kg/m3]	1.205

Typeplaatgegevens

Code	TCV252
Spanning [V]	400
Fasen	3
Stroom [A]	1.05
Polen	2
Gewicht [kg]	13
Frequentie [Hz]	50
Toerental [rpm]	2850
Vermogen [kW]	0.37
IP	55
Isolatieklasse	

Motorgegevens

IE-klasse	IE2
Grootte	63
Vermogen [kW]	0.37
Stroom [A]	1.05
Spanning [V]	400
Cos ϕ	0.78
n (rendement)	0.65

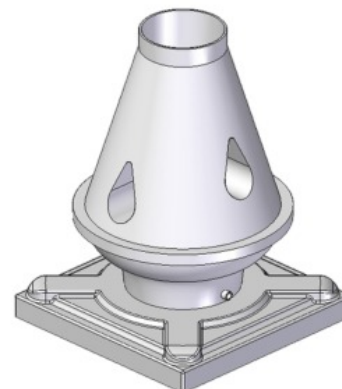






- PE gegoten huis
- PP gegoten waaier
- Roestvrijstalen schroeven

Certificeringen




Werkpunt

Q [m ³ /h]	1143
P _{sta} [Pa]	586.8
P _{tot} [Pa]	602.5
P _{in} [W]	245.9
n _{sta}	0.758
n _{tot}	0.778
Toerental [rpm]	2850

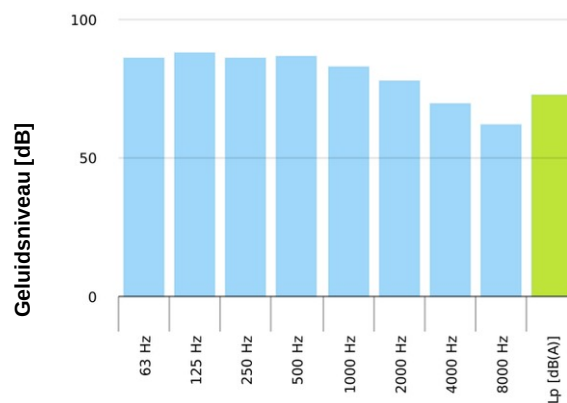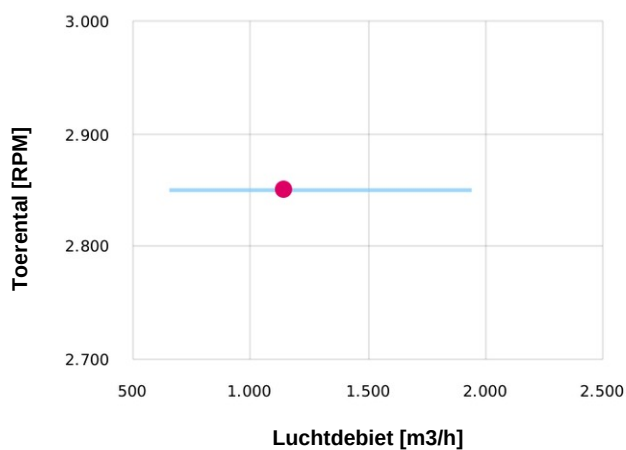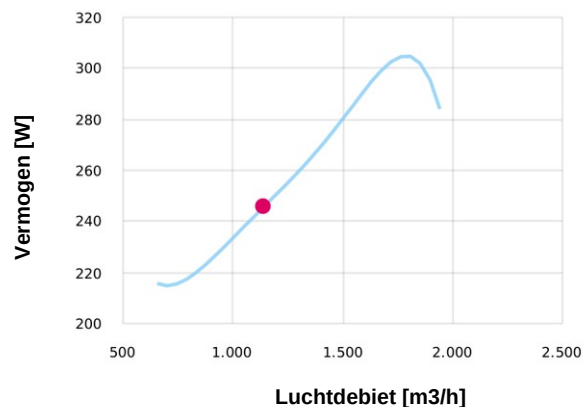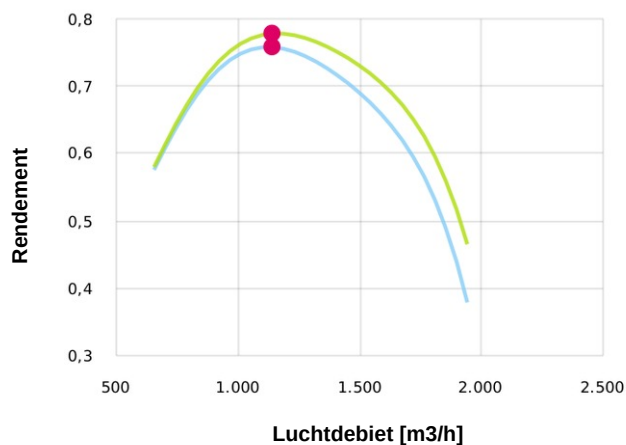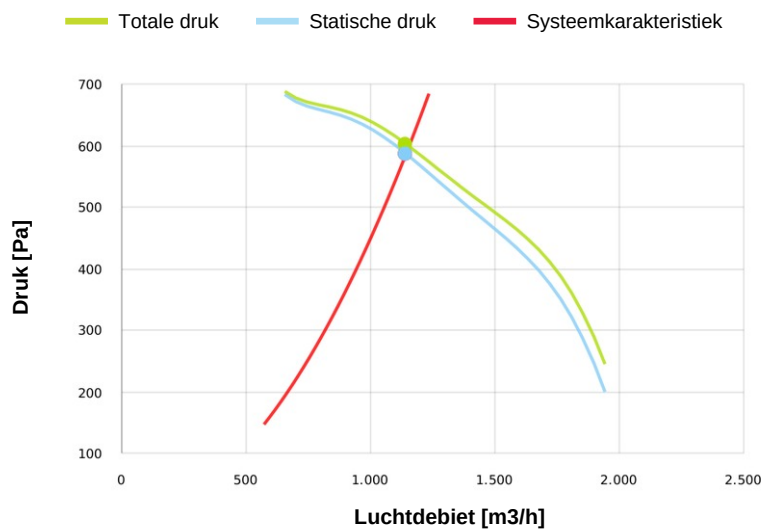


Afmetingen

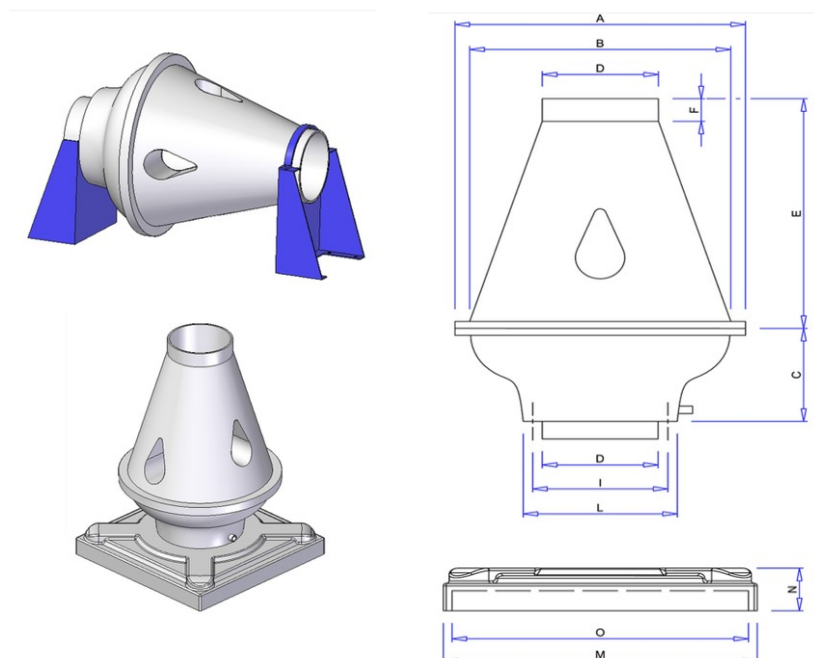

A	B	C	D	E	F	I	L	M	N	N°	O
500	450	185	200	460	50	230	265	540	80	8	490

Configuraties & CAD

LG 0°



Accessoires

Bocht 90°
200mm



Deflectorkap
200mm



Flexibele verbinding
200mm



Geluidsdemper
200/315mm



Zelfsluitende klep
200mm



Handbediende regelklep
200mm



Vaste verloop
00mm



Vaste verloop
110/200mm



Vaste verloop
125/200mm



Vaste verloop
140/200mm



Vaste verloop
160/200mm



Vaste verloop
180/200mm





Accessoires

Vaste verloop
200/225mm



Vaste verloop
200/250mm



Vaste verloop
200/280mm



Vaste verloop
200/315mm



Vaste verloop
200/355mm



Uitblaaskap met gaasrooster
200mm

