

Technische gegevens


Luchtdebiet [m3/h]	3030
Druk [Pa]	519
Druktype	Psta
Voeding	all
Dichtheid [kg/m3]	1.205

Typeplaatgegevens

Code	TCV454
Spanning [V]	400
Fasen	3
Stroom [A]	2.64
Polen	4
Gewicht [kg]	48
Frequentie [Hz]	50
Toerental [rpm]	1450
Vermogen [kW]	1.1
IP	55
Isolatieklasse	

Motorgegevens

IE-klasse	IE3
Grootte	90S
Vermogen [kW]	1.1
Stroom [A]	2.6
Spanning [V]	400
Cos ϕ	0.72
η (rendement)	0.841

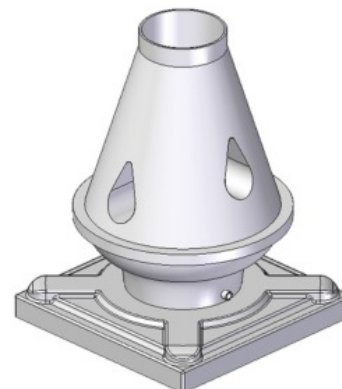






- PE gegoten huis
- PP gegoten waaier
- Roestvrijstalen schroeven

Certificeringen




Werkpunt

Q [m ³ /h]	3030
P _{sta} [Pa]	519.0
P _{tot} [Pa]	530.1
P _{in} [W]	574.4
n _{sta}	0.761
n _{tot}	0.777
Toerental [rpm]	1450

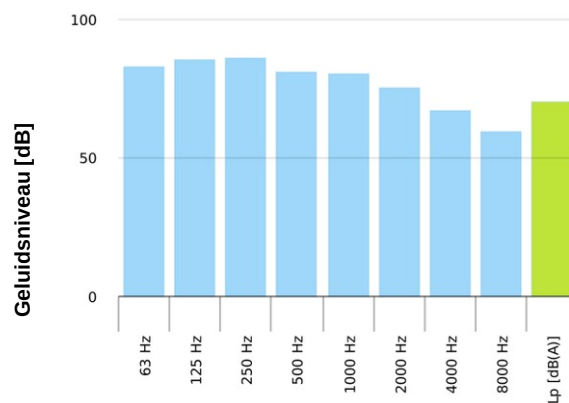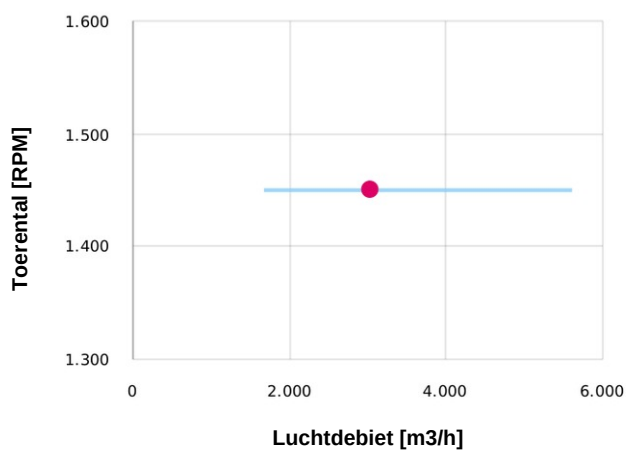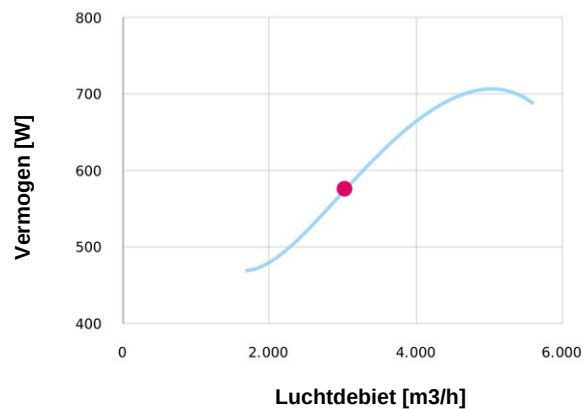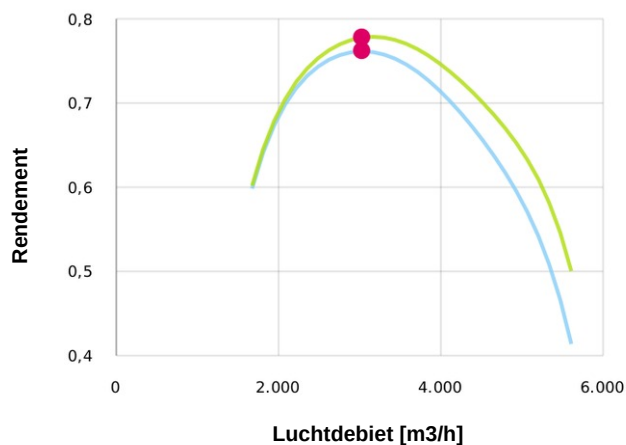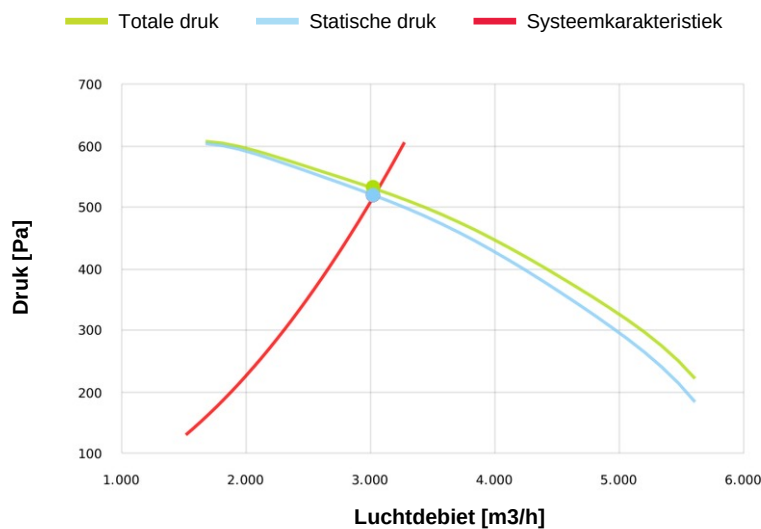


Afmetingen

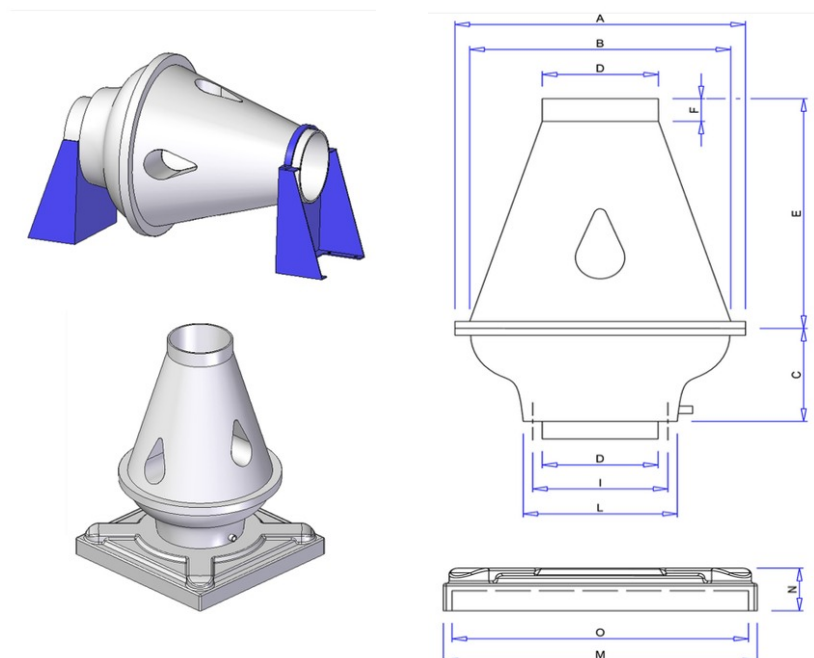

A	B	C	D	E	F	I	L	M	N	N°	O
800	730	280	355	700	50	405	450	750	100	8	700

Configuraties & CAD

LG 0°



Accessoires

Bocht 90°
355mm



Deflectorkap
355mm



Flexibele verbinding
355mm



Geluidsdemper
355/500mm



Zelfsluitende klep
355mm



Handbediende regelklep
355mm



Vaste verloop
200/355mm



Vaste verloop
225/355mm



Vaste verloop
250/355mm



Vaste verloop
280/355mm



Vaste verloop
315/355mm



Vaste verloop
355/400mm





Accessoires

Vaste verloop
355/450mm



Vaste verloop
355/500mm



Vaste verloop
355/600mm



Vaste verloop
355/700mm



Regenkap
355mm



Uitblaaskap met gaasrooster
355mm

