

Technische gegevens


Luchtdebiet [m3/h]	7294
Druk [Pa]	885.1
Druktype	Psta
Voeding	all
Dichtheid [kg/m3]	1.205

Typeplaatgegevens

Code	TCV564
Spanning [V]	400
Fasen	3
Stroom [A]	8.26
Polen	4
Gewicht [kg]	160
Frequentie [Hz]	50
Toerental [rpm]	1450
Vermogen [kW]	4
IP	55
Isolatieklasse	

Motorgegevens

IE-klasse	IE3
Grootte	112M
Vermogen [kW]	4.0
Stroom [A]	8
Spanning [V]	400
Cos ϕ	0.82
n (rendement)	0.886

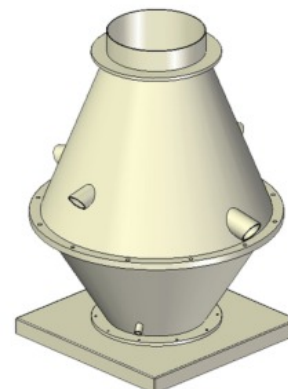






- PP gelast huis
- PP gelast waaier
- Roestvrijstalen schroeven

Certificeringen





Werkpunt

Q [m ³ /h]	7294
Psta [Pa]	885.1
Ptot [Pa]	909.9
Pin [W]	2528.
nsta	0.709
ntot	0.729
Toerental [rpm]	1450

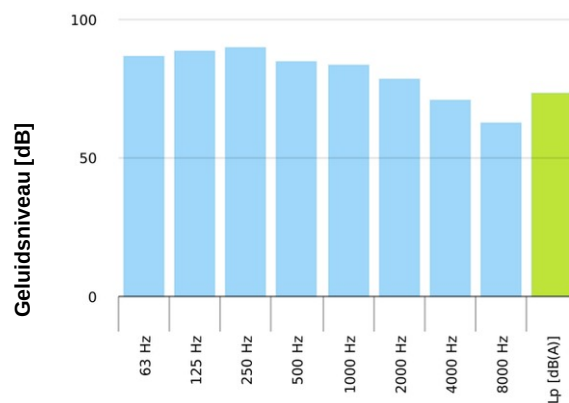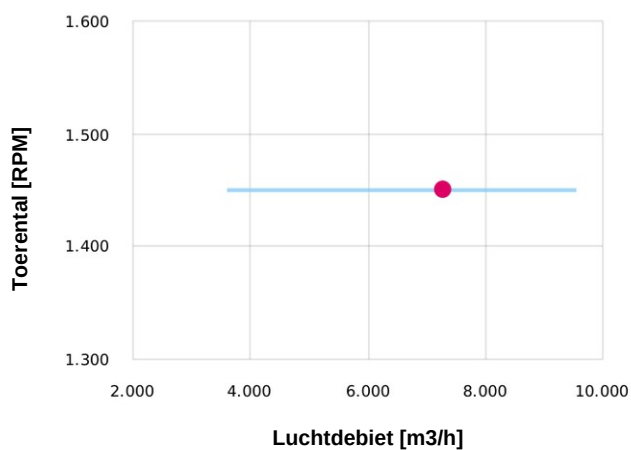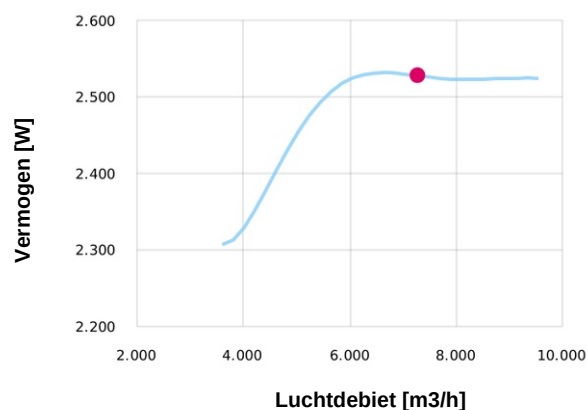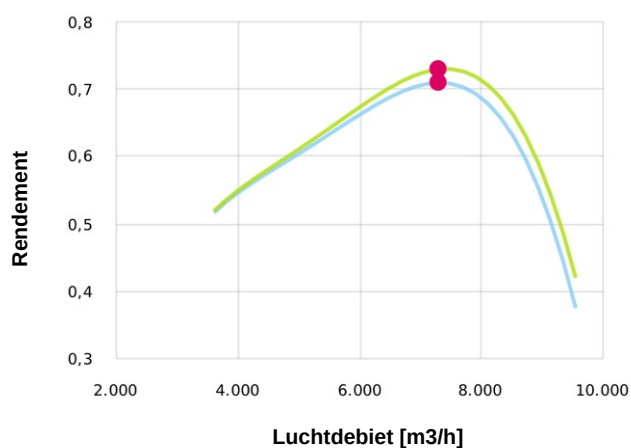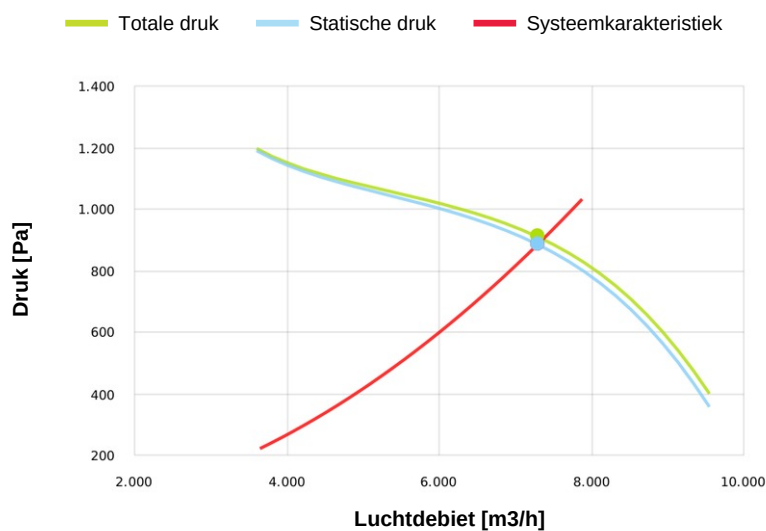


Afmetingen

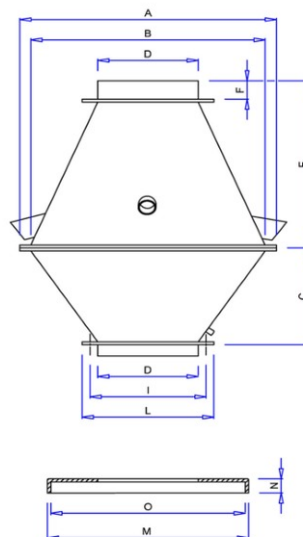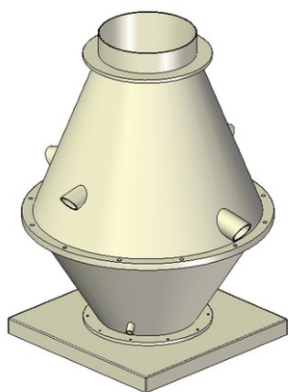

A	B	C	D	E	F	I	L	M	N	N°	O
1150	1050	430	450	800	80	560	600	900	70	10	870

Configuraties & CAD

LG 0°



Accessoires

Bocht 90°
450mm



Deflectorkap
450mm



Flexibele verbinding
450mm



Geluidsdemper
450/650mm



Zelfsluitende klep
450mm



Handbediende regelklep
450mm



Vaste verloop
250/450mm



Vaste verloop
280/450mm



Vaste verloop
315/450mm



Vaste verloop
355/450mm



Vaste verloop
400/450mm



Vaste verloop
450/500mm





Accessoires

Vaste verloop
450/600mm



Vaste verloop
450/700mm



Regenkap
450mm



Uitblaaskap met gaasrooster
450mm

