

Technische gegevens


Luchtdebiet [m ³ /h]	9439
Druk [Pa]	1242
Druktype	Psta
Voeding	all
Dichtheid [kg/m ³]	1.205

Typeplaatgegevens

Code	TCV634
Spanning [V]	400
Fasen	3
Stroom [A]	11.03
Polen	4
Gewicht [kg]	150
Frequentie [Hz]	50
Toerental [rpm]	1450
Vermogen [kW]	5.5
IP	55
Isolatieklasse	

Motorgegevens

IE-klasse	IE3
Grootte	132S
Vermogen [kW]	5.5
Stroom [A]	10.6
Spanning [V]	400
Cos ϕ	0.84
η (rendement)	0.896

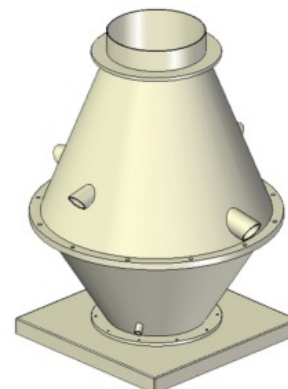






- PP gelast huis
- PP gelast waaier
- Roestvrijstalen schroeven

Certificeringen





Werkpunt

Q [m ³ /h]	9439
P _{sta} [Pa]	1242.
P _{tot} [Pa]	1269.
P _{in} [W]	4114.
n _{sta}	0.79
n _{tot}	0.807
Toerental [rpm]	1450

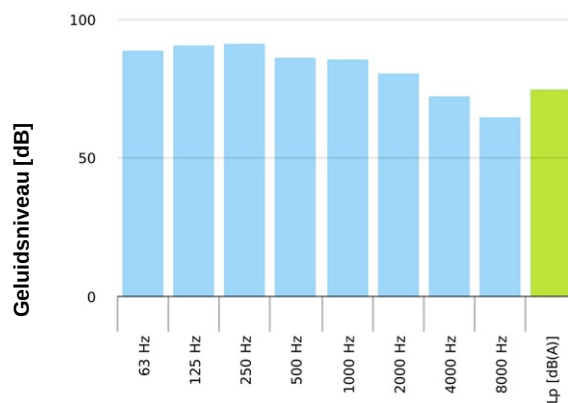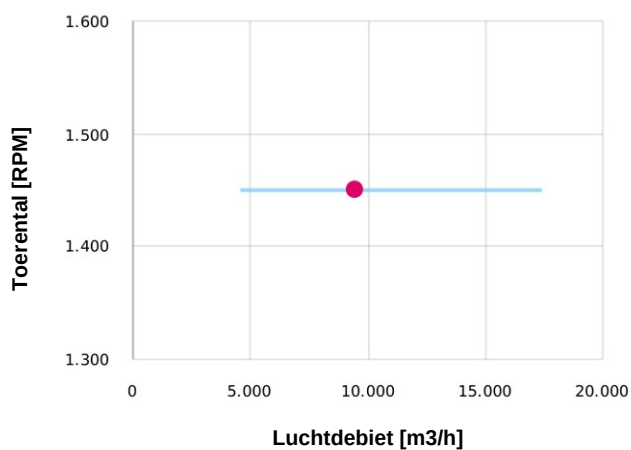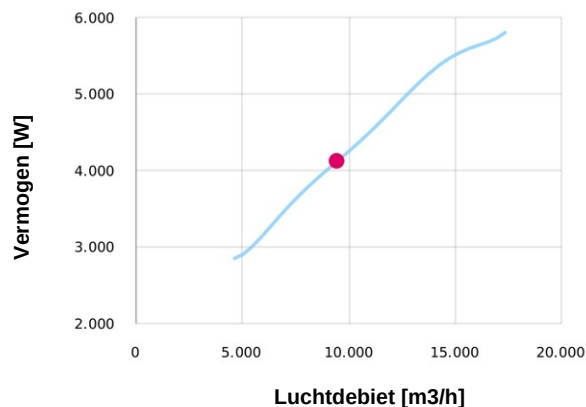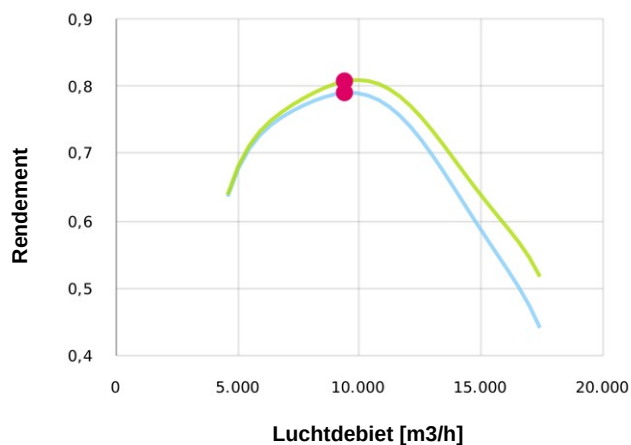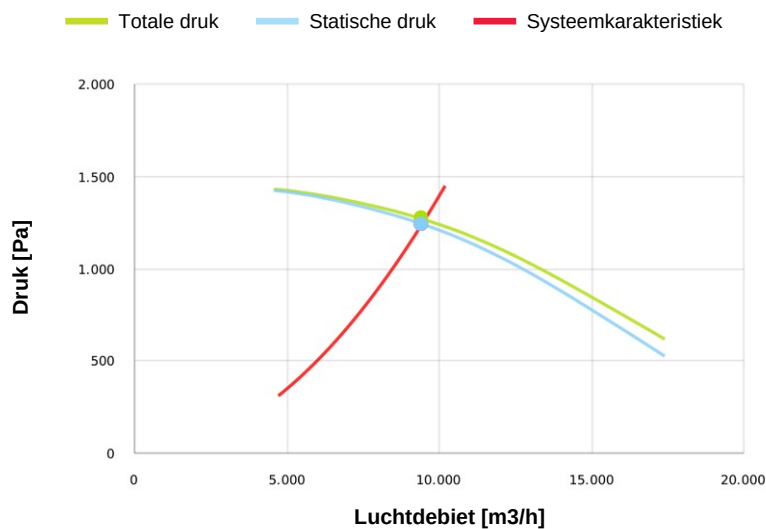


Afmetingen

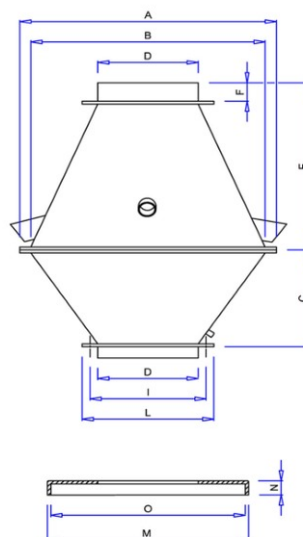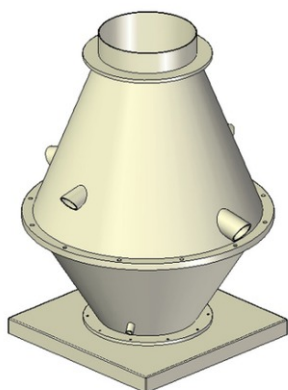

A	B	C	D	E	F	I	L	M	N	N°	O
1300	1200	450	500	900	80	610	650	1000	70	10	970

Configuraties & CAD

LG 0°



Accessoires

Bocht 90°
500mm



Deflectorkap
500mm



Flexibele verbinding
500mm



Geluidsdemper
500/700mm



Zelfsluitende klep
500mm



Handbediende regelklep
500mm



Vaste verloop
280/500mm



Vaste verloop
315/500mm



Vaste verloop
355/500mm



Vaste verloop
400/500mm



Vaste verloop
450/500mm



Vaste verloop
500/600mm





Accessoires

Vaste verloop
500/700mm



Regenkap
500mm



Uitblaaskap met gaasrooster
500mm

