

Technische gegevens


Luchtdebiet [m3/h]	12253
Druk [Pa]	1551
Druktype	Psta
Voeding	all
Dichtheid [kg/m3]	1.205

Typeplaatgegevens

Code	TCV714
Spanning [V]	400
Fasen	3
Stroom [A]	20.64
Polen	4
Gewicht [kg]	180
Frequentie [Hz]	50
Toerental [rpm]	1450
Vermogen [kW]	11
IP	55
Isolatieklasse	

Motorgegevens

IE-klasse	IE3
Grootte	160M
Vermogen [kW]	11.0
Stroom [A]	20.4
Spanning [V]	400
Cos ϕ	0.85
η (rendement)	0.914

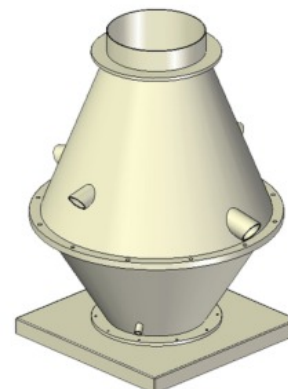






- PP gelast huis
- PP gelast waaier
- Roestvrijstalen schroeven

Certificeringen





Werkpunt

Q [m ³ /h]	12253
Psta [Pa]	1551.
Ptot [Pa]	1573.
Pin [W]	6332.
nsta	0.833
ntot	0.845
Toerental [rpm]	1450

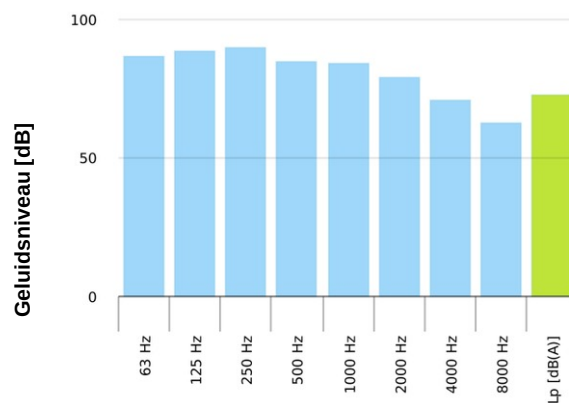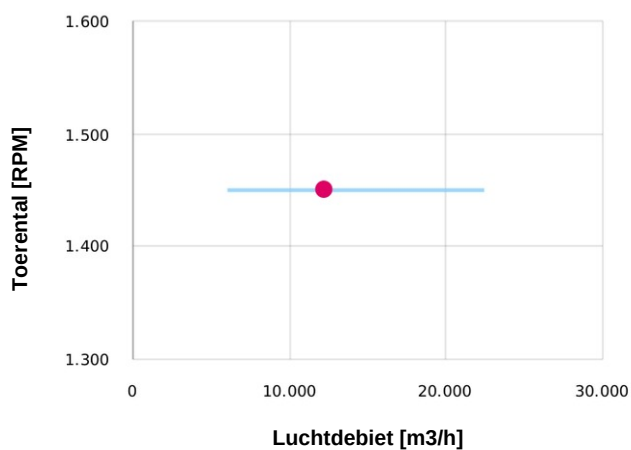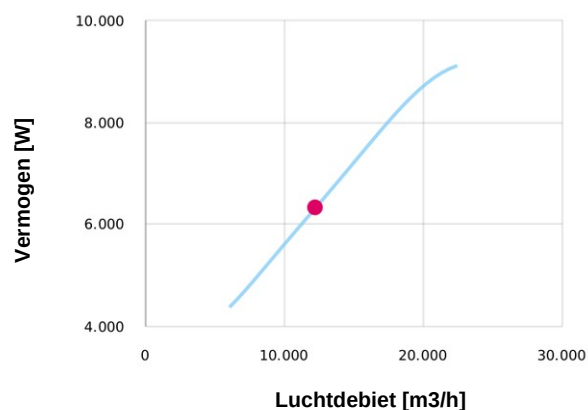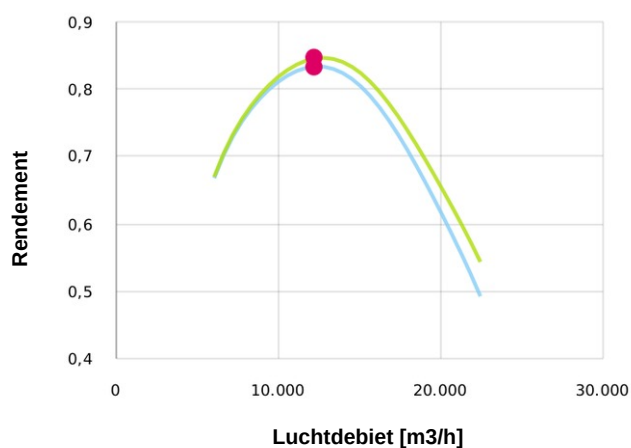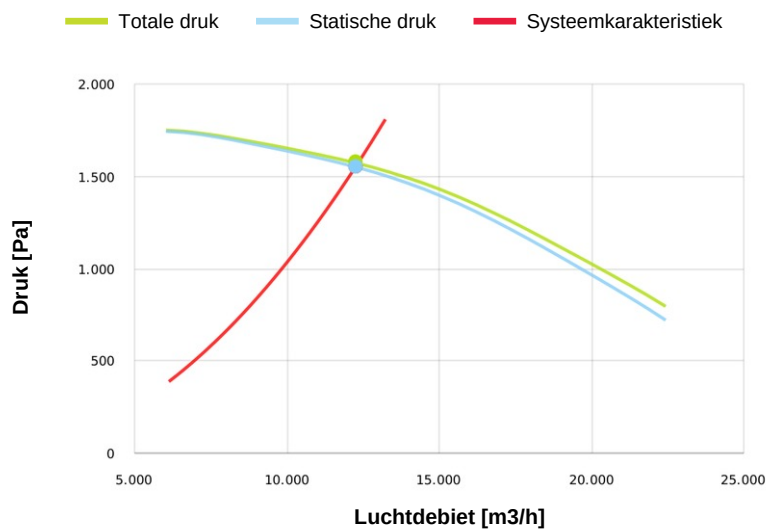


Afmetingen

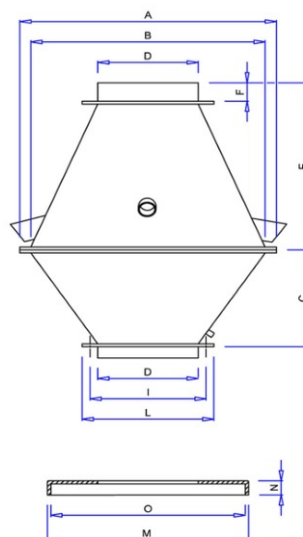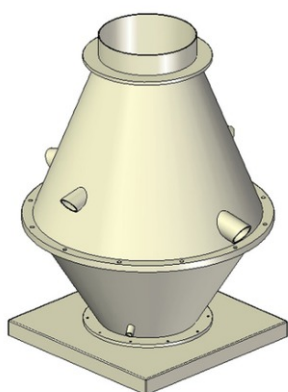


A	B	C	D	E	F	I	L	M	N	N°	O
1350	1270	500	600	1000	80	710	750	1100	70	10	1050

Configuraties & CAD


LG 0°




LG 45°




LG 90°




LG 135°




LG 180°




LG 225°




LG 270°




LG 315°




RD 0°




RD 45°




RD 90°



RD 135°




RD 180°




RD 225°



RD 270°



RD 315°



Accessoires

Bocht 90°
600mm



Deflectorkap
600mm



Flexibele verbinding
600mm



Handbediende regelklep
600mm



Vaste verloop
355/600mm



Vaste verloop
400/600mm



Vaste verloop
450/600mm



Vaste verloop
500/600mm



Vaste verloop
600/700mm



Vaste verloop
600/710mm



Uitblaaskap met gaasrooster
600mm

