

Technische gegevens


Luchtdebiet [m ³ /h]	7906
Druk [Pa]	636.8
Druktype	Psta
Voeding	all
Dichtheid [kg/m ³]	1.205

Typeplaatgegevens

Code	TCV716
Spanning [V]	400
Fasen	3
Stroom [A]	9.44
Polen	6
Gewicht [kg]	150
Frequentie [Hz]	50
Toerental [rpm]	930
Vermogen [kW]	4
IP	55
Isolatieklasse	

Motorgegevens

IE-klasse	IE3
Grootte	132M
Vermogen [kW]	4.0
Stroom [A]	9
Spanning [V]	400
Cos ϕ	0.74
n (rendement)	0.868

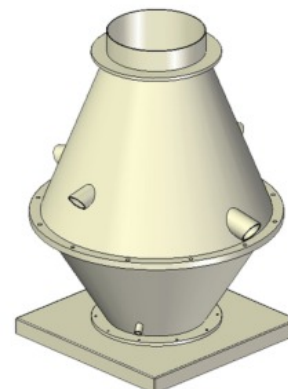






- PP gelast huis
- PP gelast waaier
- Roestvrijstalen schroeven

Certificeringen




Werkpunt

Q [m ³ /h]	7906
Psta [Pa]	636.8
Ptot [Pa]	646.0
Pin [W]	1677.
nsta	0.833
ntot	0.845
Toerental [rpm]	930

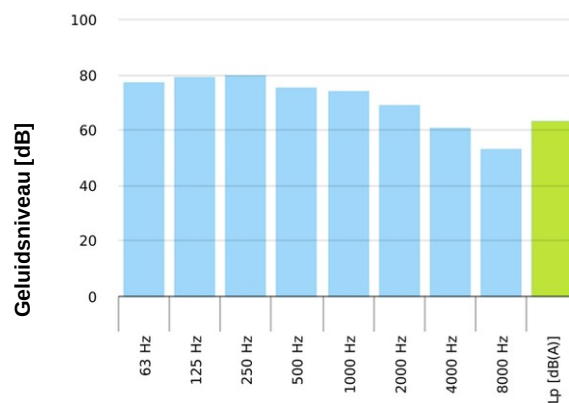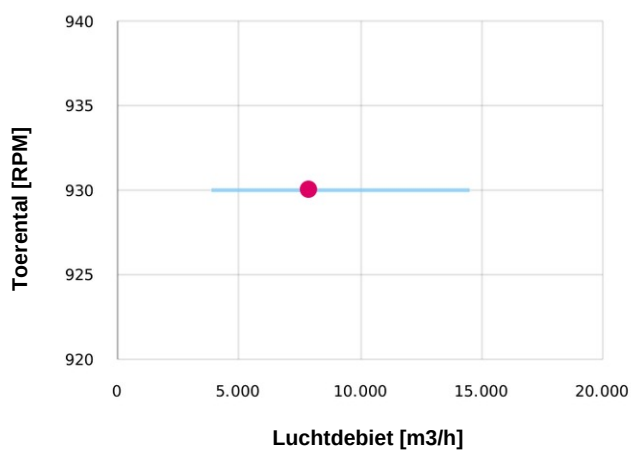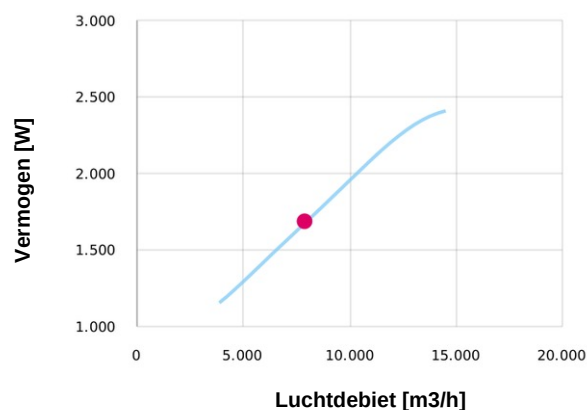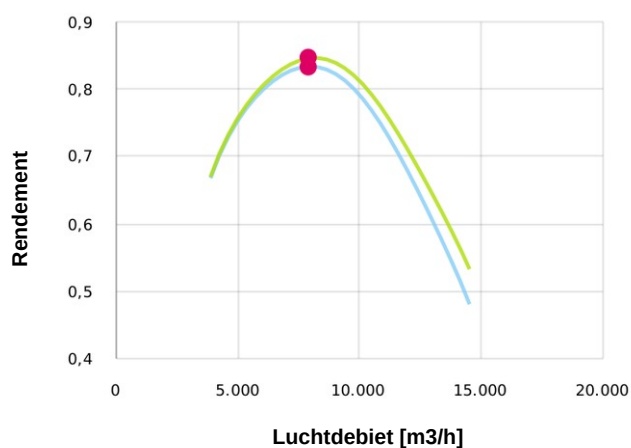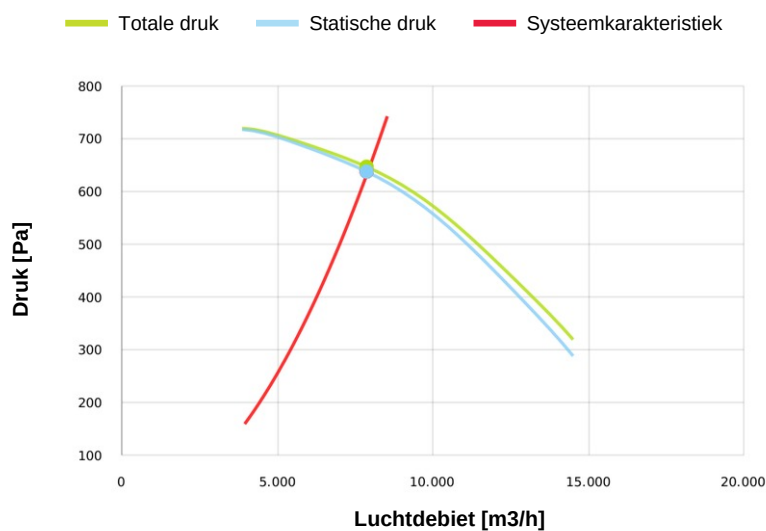


Afmetingen

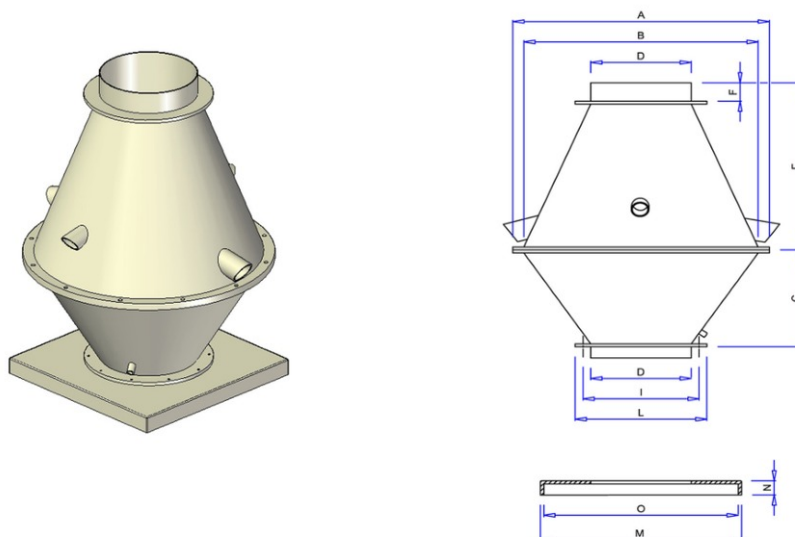


A	B	C	D	E	F	I	L	M	N	N°	O
1350	1270	500	600	1000	80	710	750	1100	70	10	1050

Configuraties & CAD


LG 0°




LG 45°




LG 90°




LG 135°




LG 180°




LG 225°




LG 270°




LG 315°




RD 0°




RD 45°




RD 90°



RD 135°




RD 180°




RD 225°



RD 270°



RD 315°



Accessoires

Bocht 90°
600mm



Deflectorkap
600mm



Flexibele verbinding
600mm



Handbediende regelklep
600mm



Vaste verloop
355/600mm



Vaste verloop
400/600mm



Vaste verloop
450/600mm



Vaste verloop
500/600mm



Vaste verloop
600/700mm



Vaste verloop
600/710mm



Uitblaaskap met gaasrooster
600mm

