

Technische gegevens


Luchtdebiet [m3/h]	13007
Druk [Pa]	855.4
Druktype	Psta
Voeding	all
Dichtheid [kg/m3]	1.205

Typeplaatgegevens

Code	TCV806
Spanning [V]	400
Fasen	3
Stroom [A]	16.55
Polen	6
Gewicht [kg]	220
Frequentie [Hz]	50
Toerental [rpm]	930
Vermogen [kW]	7.5
IP	55
Isolatieklasse	

Motorgegevens

IE-klasse	IE3
Grootte	160M
Vermogen [kW]	7.5
Stroom [A]	16
Spanning [V]	400
Cos ϕ	0.76
n (rendement)	0.891

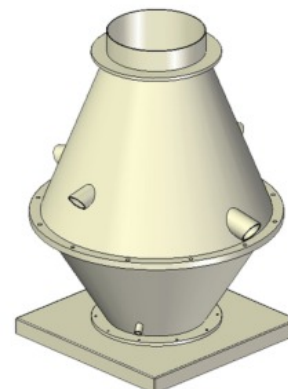






- PP gelast huis
- PP gelast waaier
- Roestvrijstalen schroeven

Certificeringen




Werkpunt

Q [m ³ /h]	13007
P _{sta} [Pa]	855.4
P _{tot} [Pa]	868.9
P _{in} [W]	3976.
n _{sta}	0.777
n _{tot}	0.789
Toerental [rpm]	930

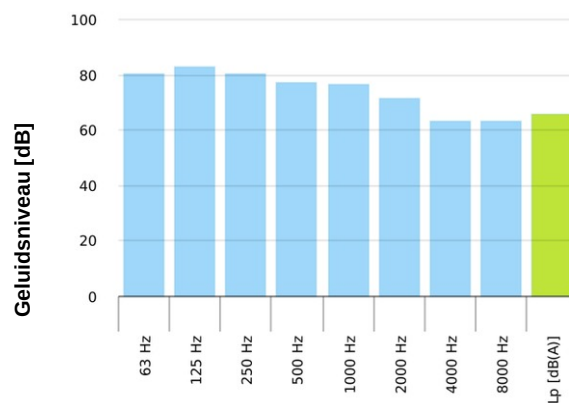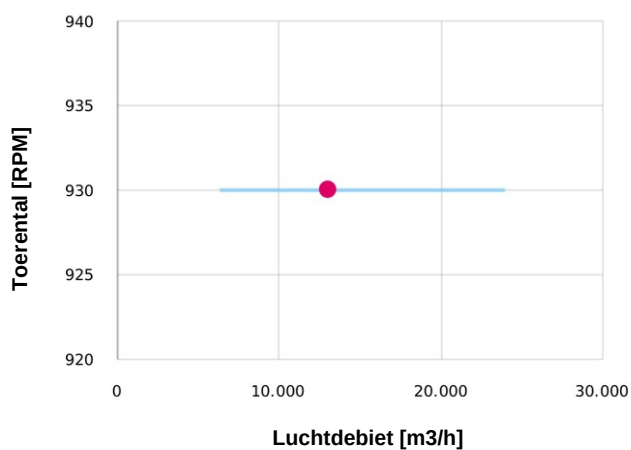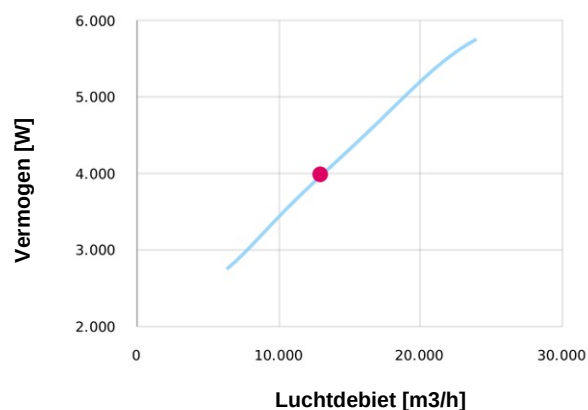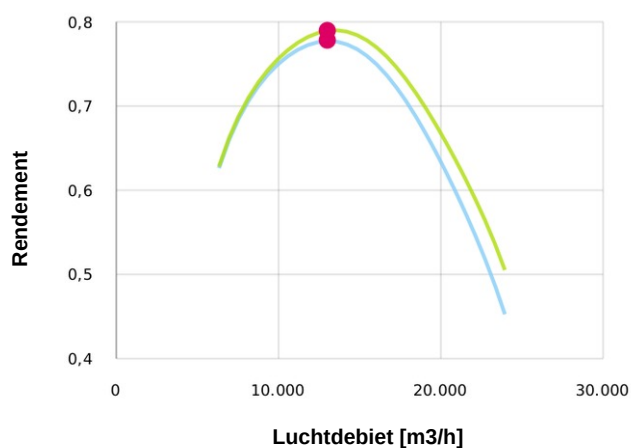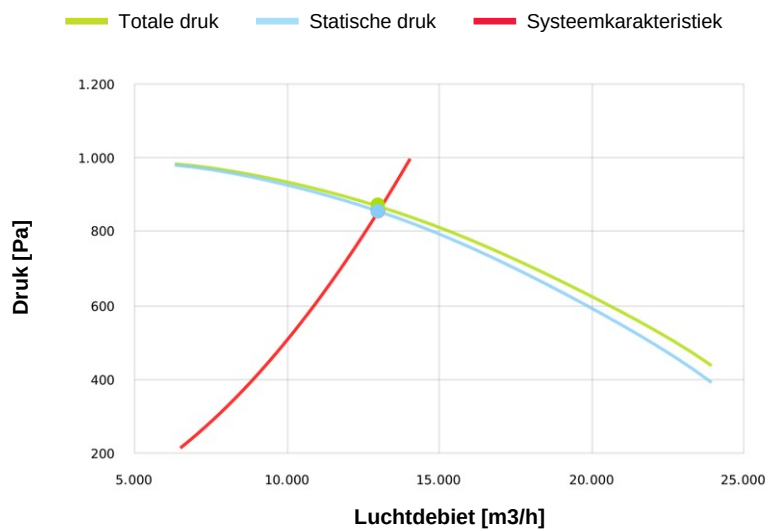


Afmetingen

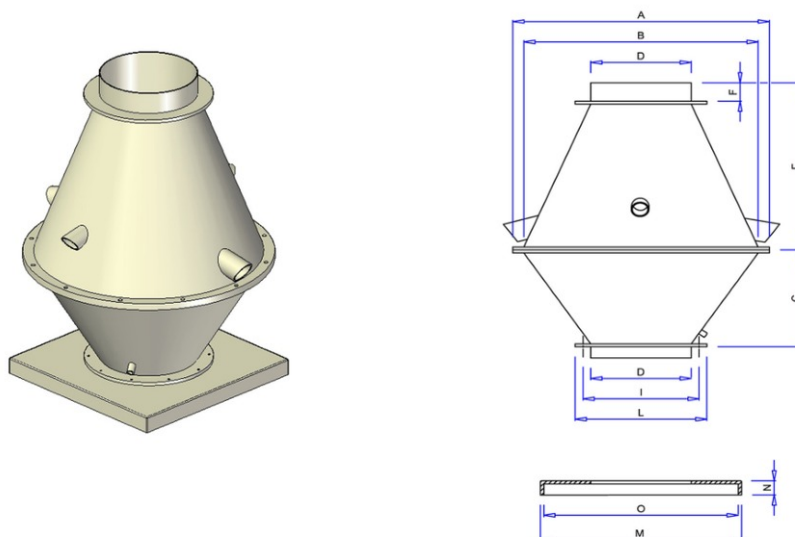

A	B	C	D	E	F	I	L	M	N	N°	O
1600	1500	520	700	1300	80	810	850	1200	70	10	1150

Configuraties & CAD

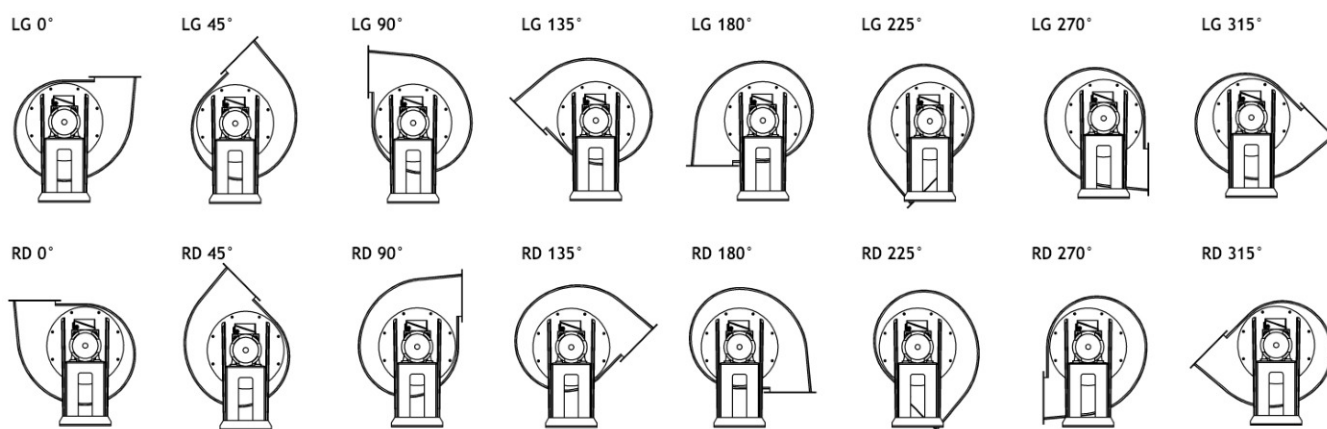

Accessoires

Bocht 90°
700mm



Deflectorkap
700mm



Flexibele verbinding
700mm



Handbediende regelklep
700mm



Vaste verloop
355/700mm



Vaste verloop
400/700mm



Vaste verloop
450/700mm



Vaste verloop
500/700mm



Vaste verloop
600/700mm



Uitblaaskap met gaasrooster
700mm

