

Technische gegevens


Luchtdebiet [m ³ /h]	4598
Druk [Pa]	794.6
Druktype	Psta
Voeding	all
Dichtheid [kg/m ³]	1.205

Typeplaatgegevens

Code	KR504ST
Spanning [V]	400
Fasen	3
Stroom [A]	4.84
Polen	4
Gewicht [kg]	70
Frequentie [Hz]	50
Toerental [rpm]	1450
Vermogen [kW]	2.2
IP	55
Isolatieklasse	

Motorgegevens

IE-klasse	IE3
Grootte	100L
Vermogen [kW]	2.2
Stroom [A]	4.5
Spanning [V]	400
Cos ϕ	0.82
n (rendement)	0.867

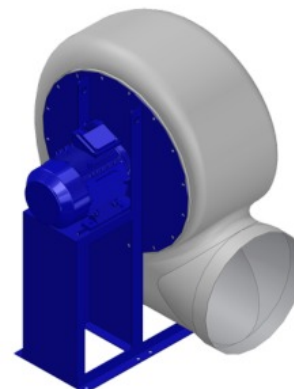






- PE gegoten huis
- PP/INOX/Fe+ebonite waaier
- Staal gecoate motorsteun
- Roestvrijstalen schroeven

Certificeringen




Werkpunt

Q [m ³ /h]	4598
P _{sta} [Pa]	794.6
P _{tot} [Pa]	810.5
P _{in} [W]	1335.
n _{sta}	0.759
n _{tot}	0.774
Toerental [rpm]	1450

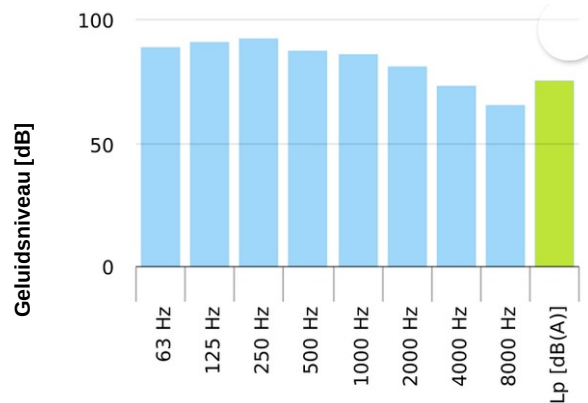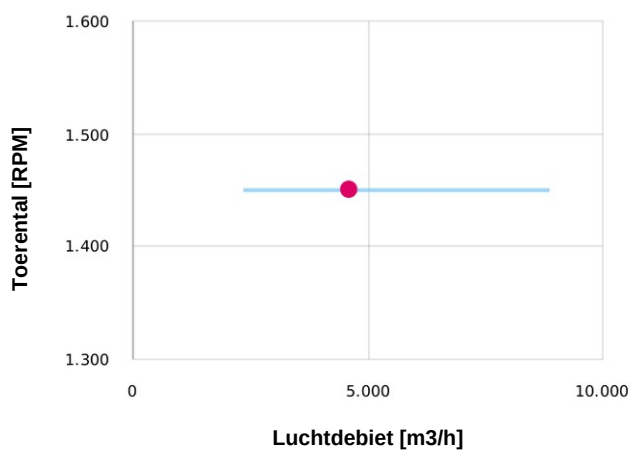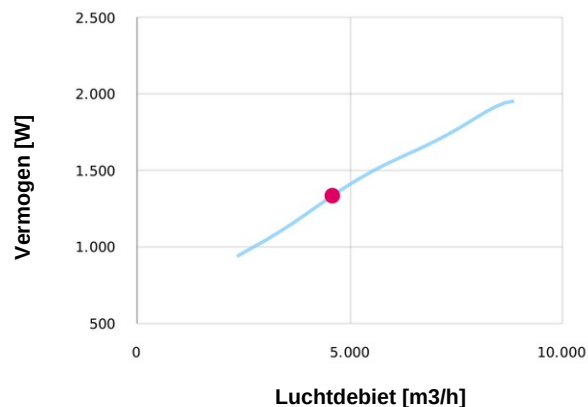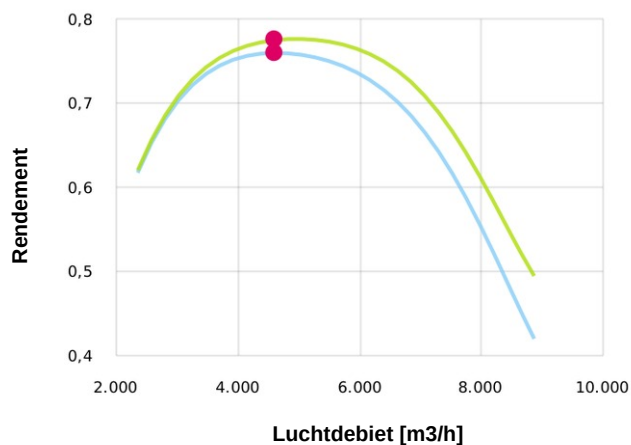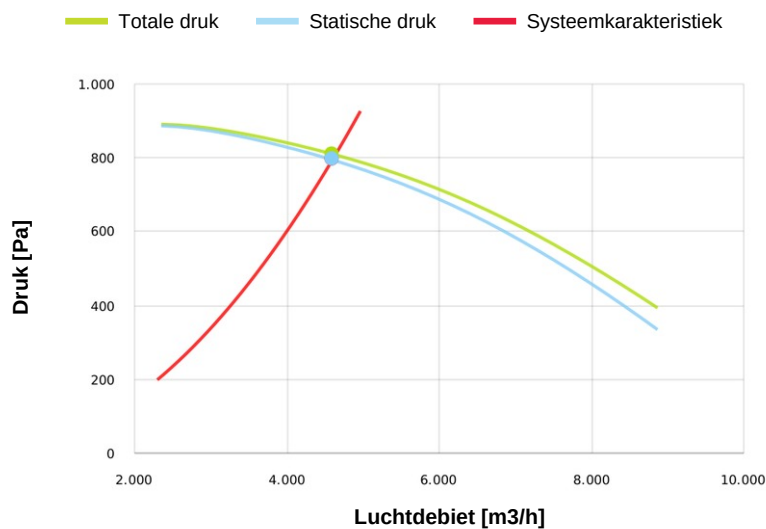


Afmetingen

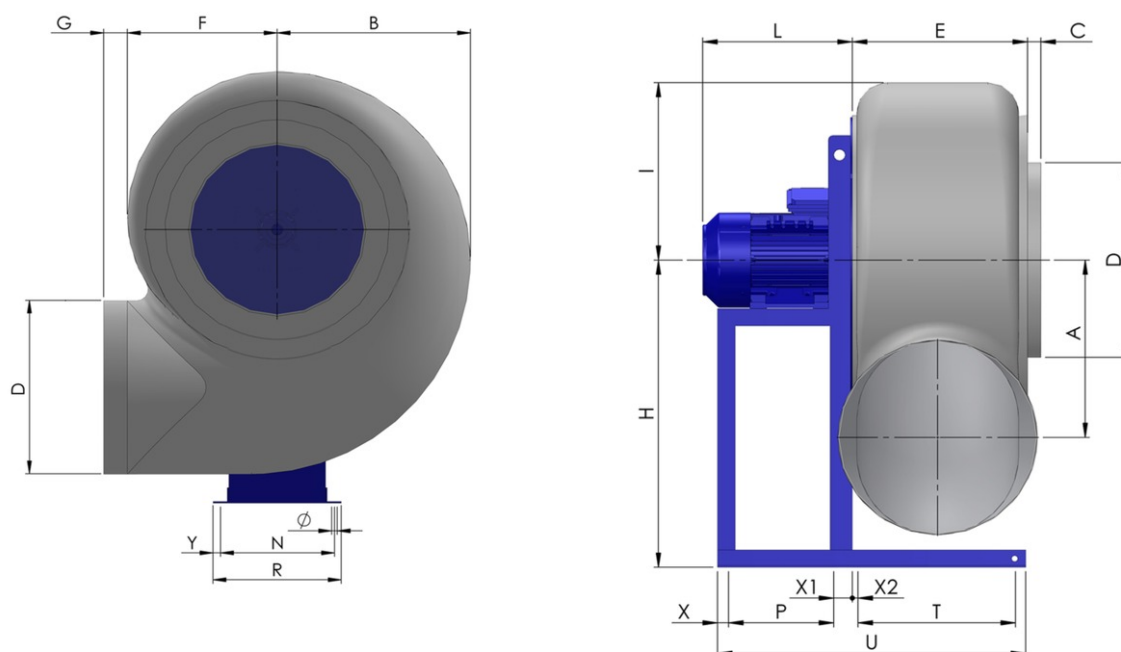

A	B	C	D	E	F	G	H	I	L	N	Ø	P	R
360	460	50	400	355	355	80	630	395	300	289	14	197	325

Configuraties & CAD

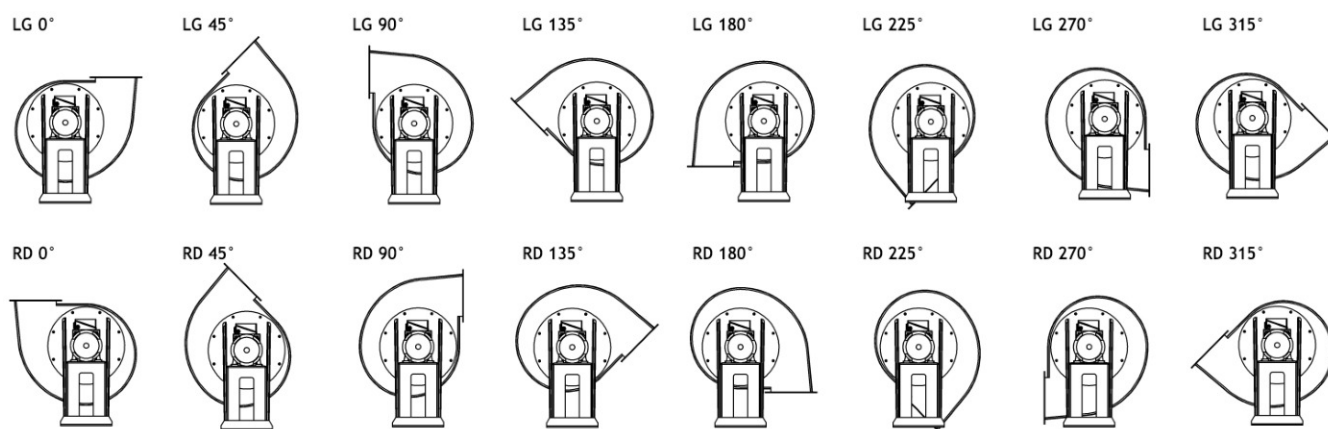

Accessoires

Bocht 90°
400mm



Deflectorkap
400mm



Flexibele verbinding
400mm



Geluidsdemper
400/600mm



Zelfsluitende klep
400mm



Handbediende regelklep
400mm



Vaste verloop
225/400mm



Vaste verloop
250/400mm



Vaste verloop
280/400mm



Vaste verloop
315/400mm



Vaste verloop
355/400mm



Vaste verloop
400/450mm





Accessoires

Vaste verloop
400/500mm



Vaste verloop
400/600mm



Vaste verloop
400/700mm



Regenkap
400mm



Uitblaaskap met gaasrooster
400mm

