

Technische gegevens


Luchtdebiet [m ³ /h]	3339
Druk [Pa]	1113
Druktype	Psta
Voeding	all
Dichtheid [kg/m ³]	1.205

Typeplaatgegevens

Code	KR564ST
Spanning [V]	400
Fasen	3
Stroom [A]	8.26
Polen	4
Gewicht [kg]	110
Frequentie [Hz]	50
Toerental [rpm]	1450
Vermogen [kW]	4
IP	55
Isolatieklasse	

Motorgegevens

IE-klasse	IE3
Grootte	112M
Vermogen [kW]	4.0
Stroom [A]	8
Spanning [V]	400
Cos ϕ	0.82
n (rendement)	0.886

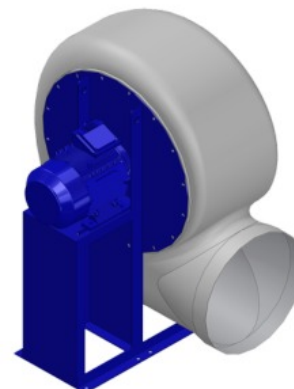






- PE gegoten huis
- PP/INOX/Fe+ebonite waaier
- Staal gecoat motorsteun
- Roestvrijstalen schroeven

Certificeringen




Werkpunt

Q [m ³ /h]	3339
P _{sta} [Pa]	1113.
P _{tot} [Pa]	1119.
P _{in} [W]	1679.
n _{sta}	0.615
n _{tot}	0.618
Toerental [rpm]	1450

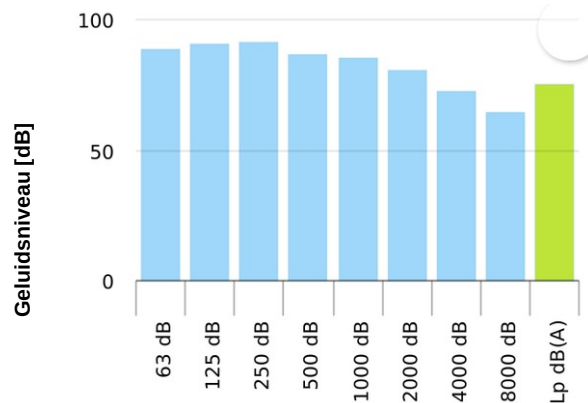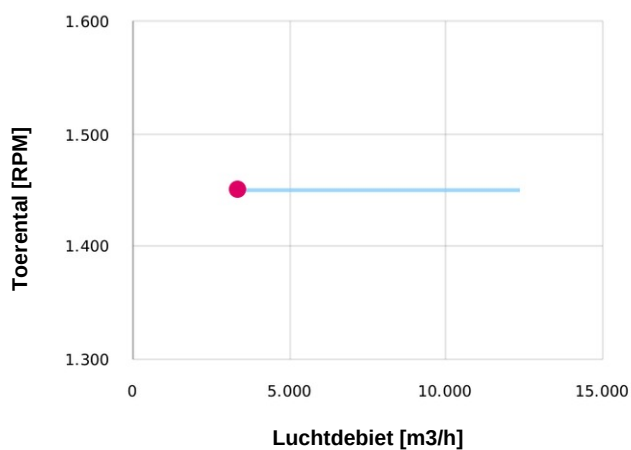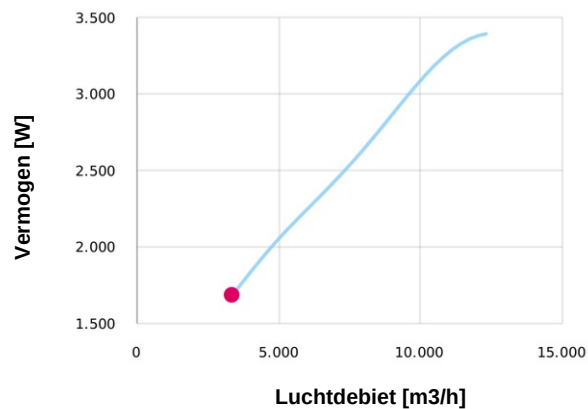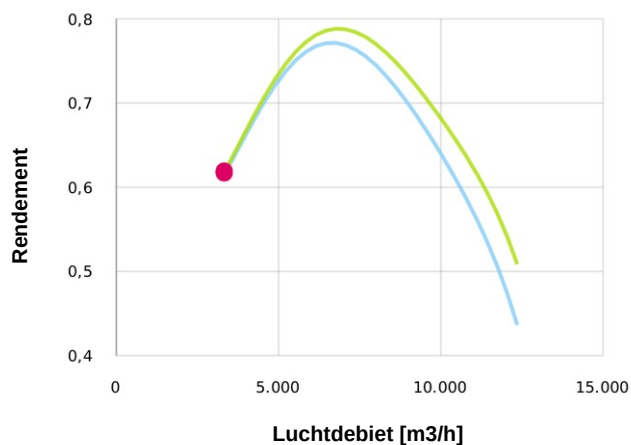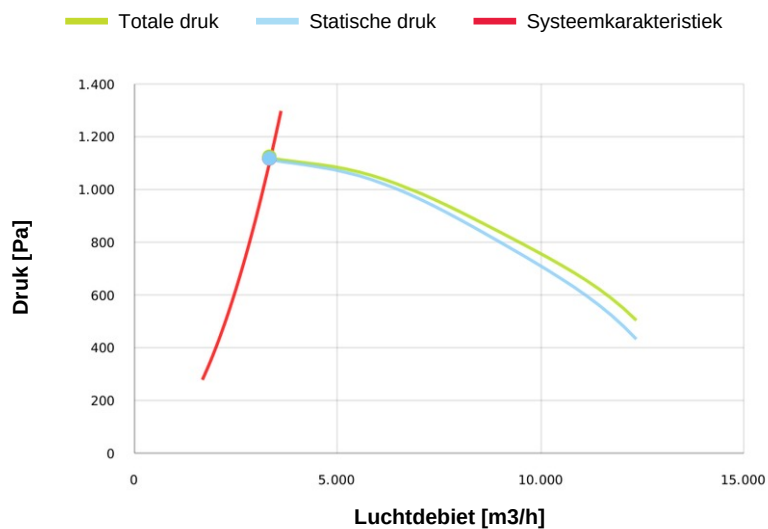


Afmetingen

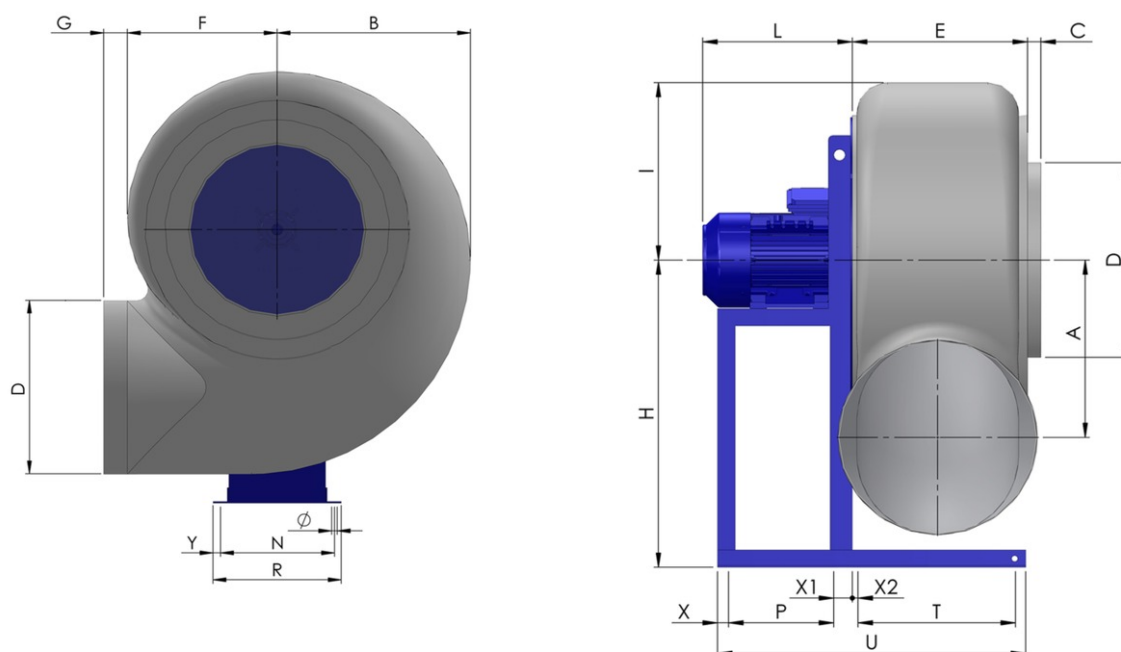

A	B	C	D	E	F	G	H	I	L	N	Ø	P	R
410	490	50	450	365	380	80	710	410	340	289	14	270	325

Configuraties & CAD

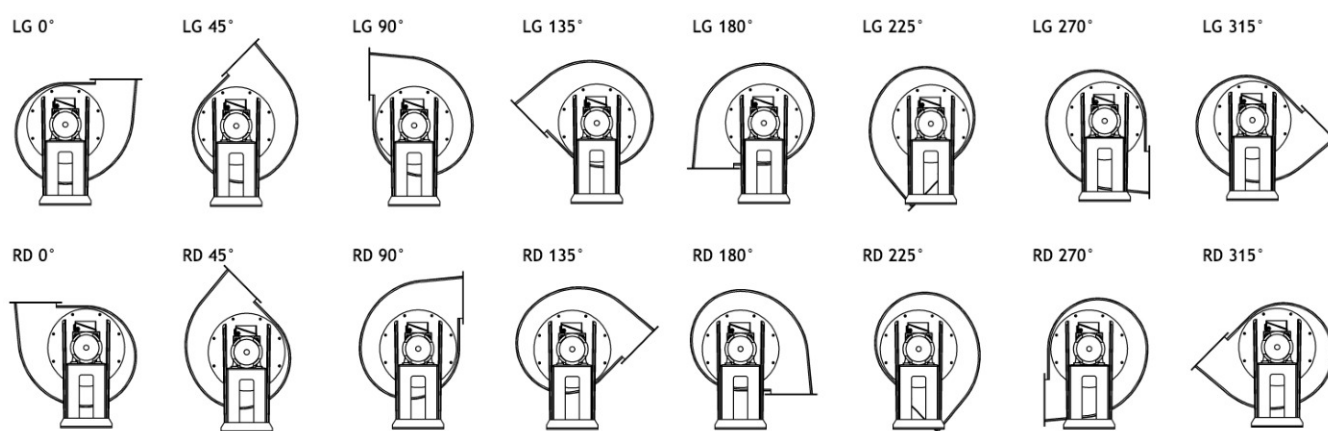

Accessoires

Bocht 90°
450mm



Deflectorkap
450mm



Flexibele verbinding
450mm



Geluidsdemper
450/650mm



Zelfsluitende klep
450mm



Handbediende regelklep
450mm



Vaste verloop
250/450mm



Vaste verloop
280/450mm



Vaste verloop
315/450mm



Vaste verloop
355/450mm



Vaste verloop
400/450mm



Vaste verloop
450/500mm





Accessoires

Vaste verloop
450/600mm



Vaste verloop
450/700mm



Regenkap
450mm



Uitblaaskap met gaasrooster
450mm

