

Technische gegevens


Luchtdebiet [m ³ /h]	4425
Druk [Pa]	421.9
Druktype	Psta
Voeding	all
Dichtheid [kg/m ³]	1.205

Typeplaatgegevens

Code	KR566ST
Spanning [V]	400
Fasen	3
Stroom [A]	3.02
Polen	6
Gewicht [kg]	87
Frequentie [Hz]	50
Toerental [rpm]	950
Vermogen [kW]	1.1
IP	55
Isolatieklasse	

Motorgegevens

IE-klasse	IE3
Grootte	90L
Vermogen [kW]	1.1
Stroom [A]	2.9
Spanning [V]	400
Cos ϕ	0.67
n (rendement)	0.81

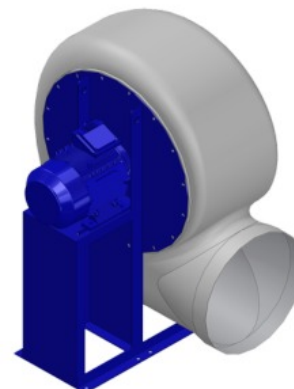






- PE gegoten huis
- PP/INOX/Fe+ebonite waaier
- Staal gecoate motorsteun
- Roestvrijstalen schroeven

Certificeringen




Werkpunt

Q [m ³ /h]	4425
P _{sta} [Pa]	421.9
P _{tot} [Pa]	431.0
P _{in} [W]	671.7
n _{sta}	0.771
n _{tot}	0.788
Toerental [rpm]	950

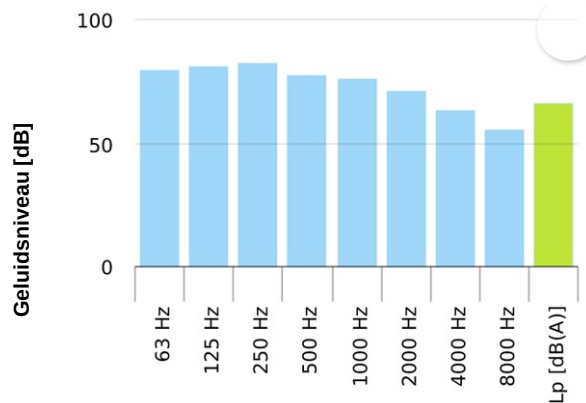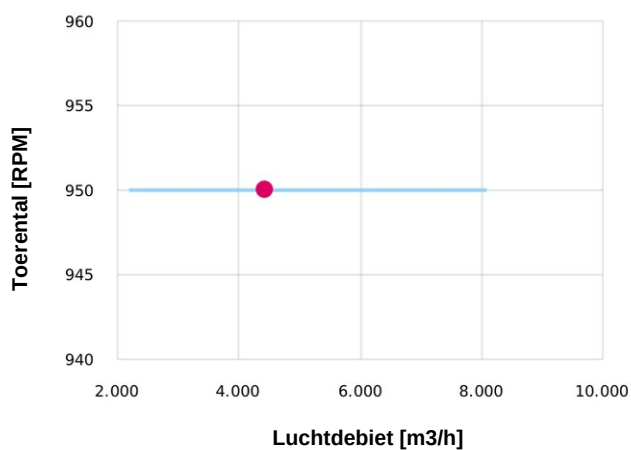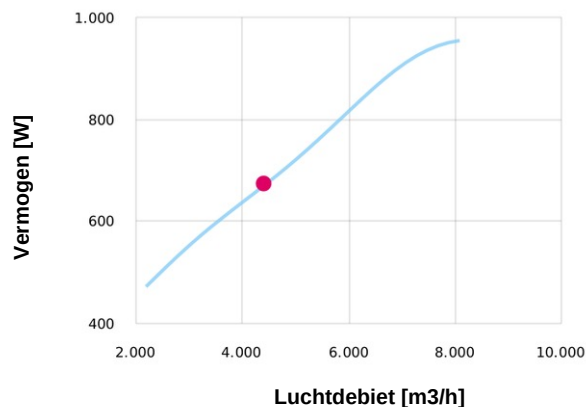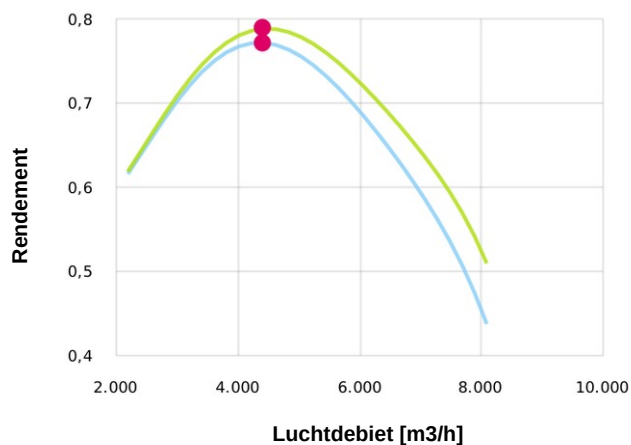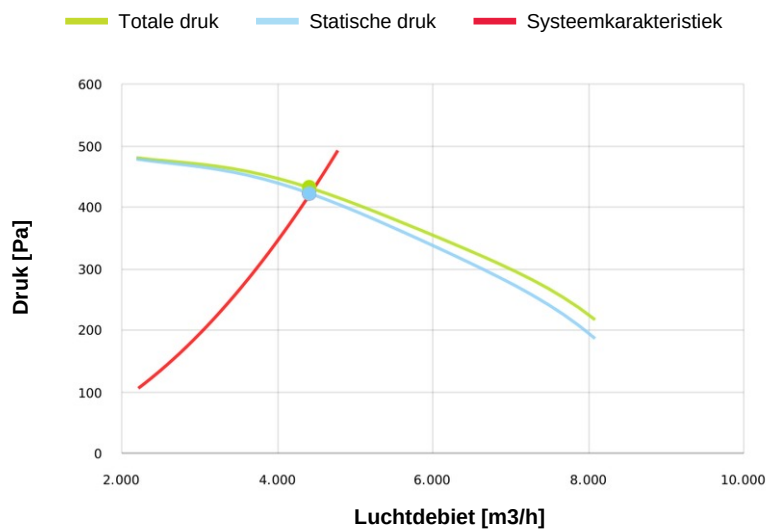


Afmetingen

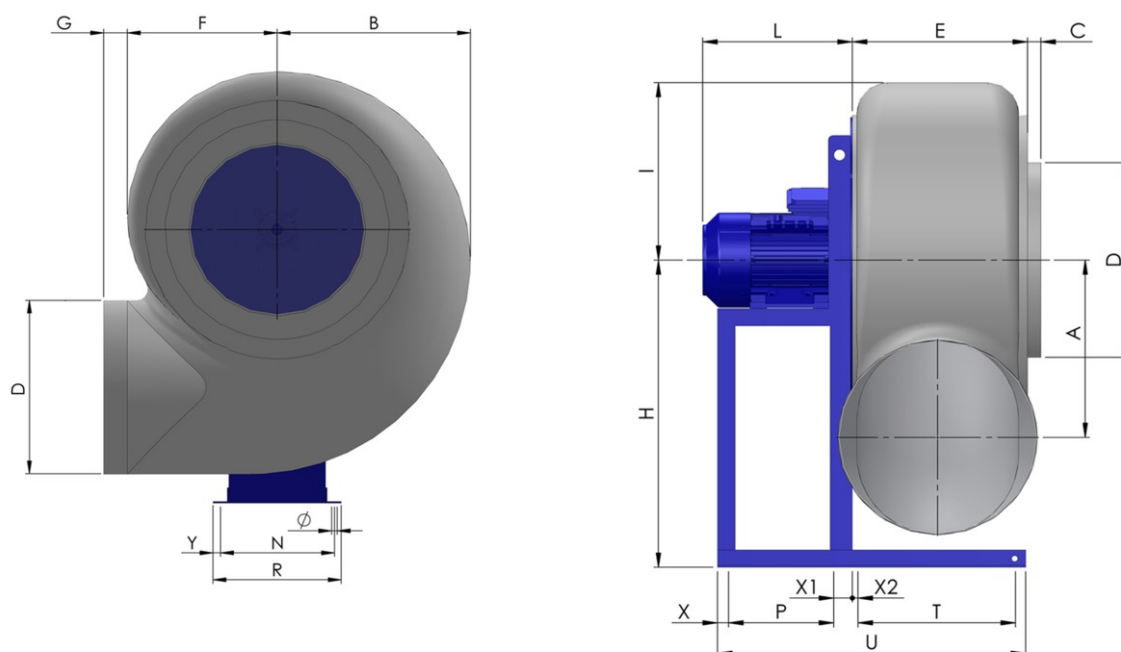

A	B	C	D	E	F	G	H	I	L	N	Ø	P	R
410	490	50	450	365	380	80	710	410	330	289	14	237	325

Configuraties & CAD

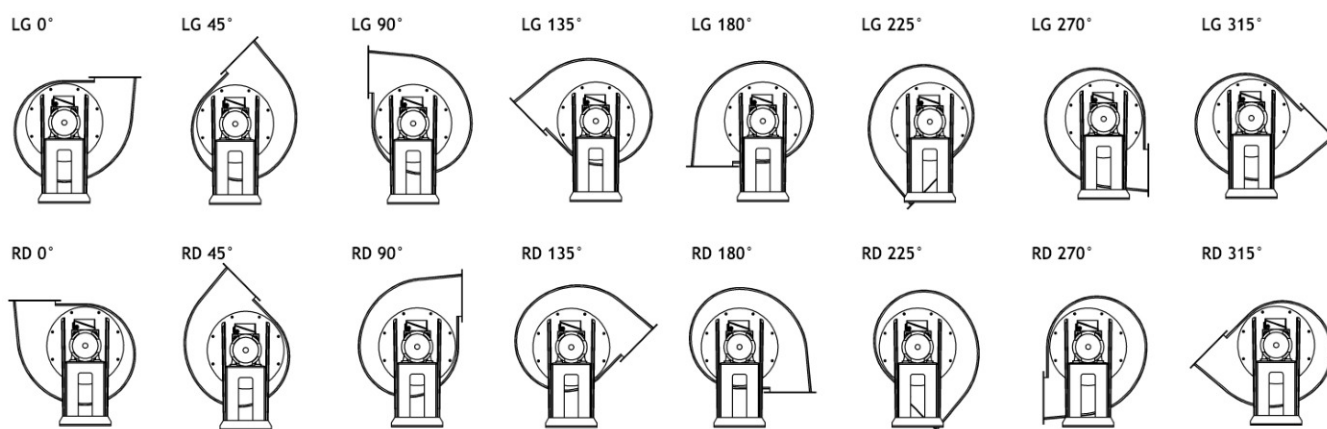

Accessoires

Bocht 90°
450mm



Deflectorkap
450mm



Flexibele verbinding
450mm



Geluidsdemper
450/650mm



Zelfsluitende klep
450mm



Handbediende regelklep
450mm



Vaste verloop
250/450mm



Vaste verloop
280/450mm



Vaste verloop
315/450mm



Vaste verloop
355/450mm



Vaste verloop
400/450mm



Vaste verloop
450/500mm





Accessoires

Vaste verloop
450/600mm



Vaste verloop
450/700mm



Regenkap
450mm



Uitblaaskap met gaasrooster
450mm

