

Technische gegevens


Luchtdebiet [m ³ /h]	4640
Druk [Pa]	1411
Druktype	Psta
Voeding	all
Dichtheid [kg/m ³]	1.205

Typeplaatgegevens

Code	KR634ST
Spanning [V]	400
Fasen	3
Stroom [A]	11.03
Polen	4
Gewicht [kg]	112
Frequentie [Hz]	50
Toerental [rpm]	1450
Vermogen [kW]	5.5
IP	55
Isolatieklasse	

Motorgegevens

IE-klasse	IE3
Grootte	132S
Vermogen [kW]	5.5
Stroom [A]	10.6
Spanning [V]	400
Cos ϕ	0.84
n (rendement)	0.896

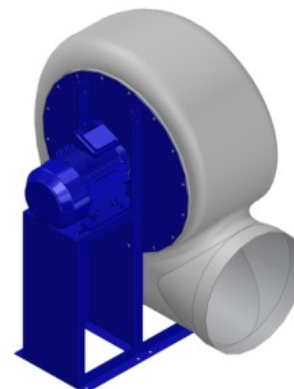






- PE gegoten huis
- PP/INOX/Fe+ebonite waaier
- Staal gecoate motorsteun
- Roestvrijstalen schroeven

Certificeringen




Werkpunt

Q [m ³ /h]	4640
P _{sta} [Pa]	1411.
P _{tot} [Pa]	1417.
P _{in} [W]	2846.
n _{sta}	0.637
n _{tot}	0.64
Toerental [rpm]	1450

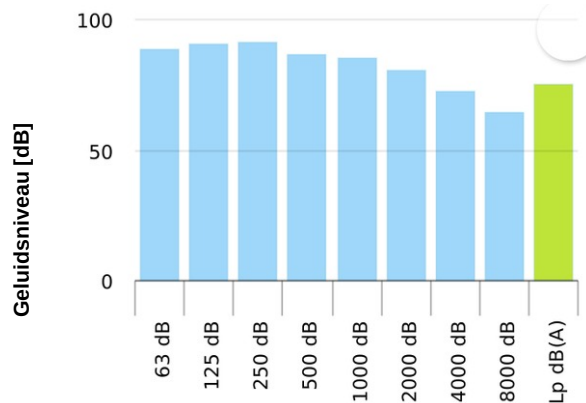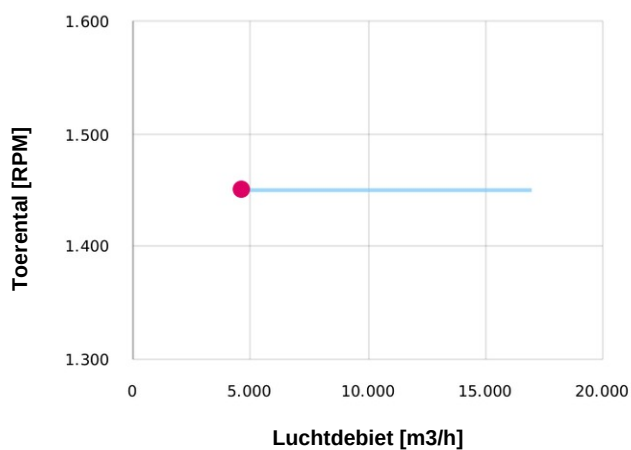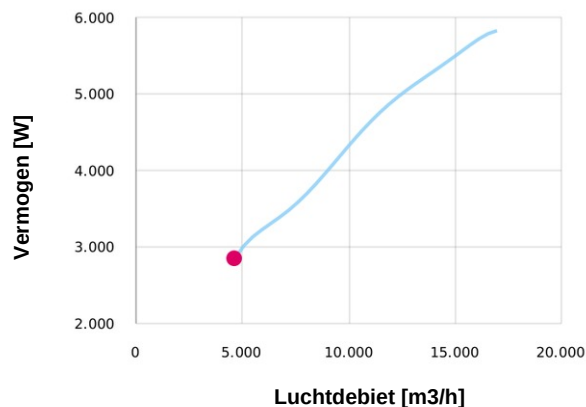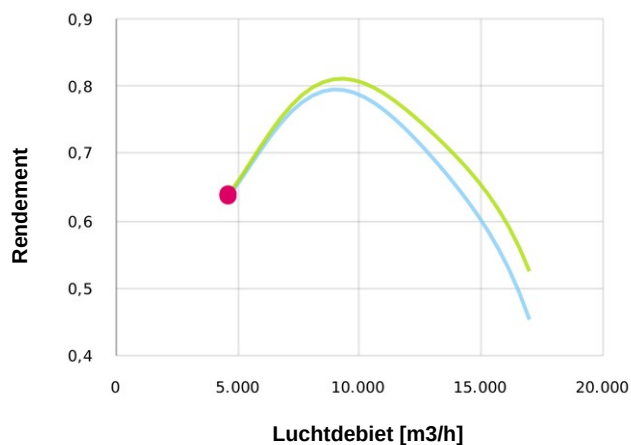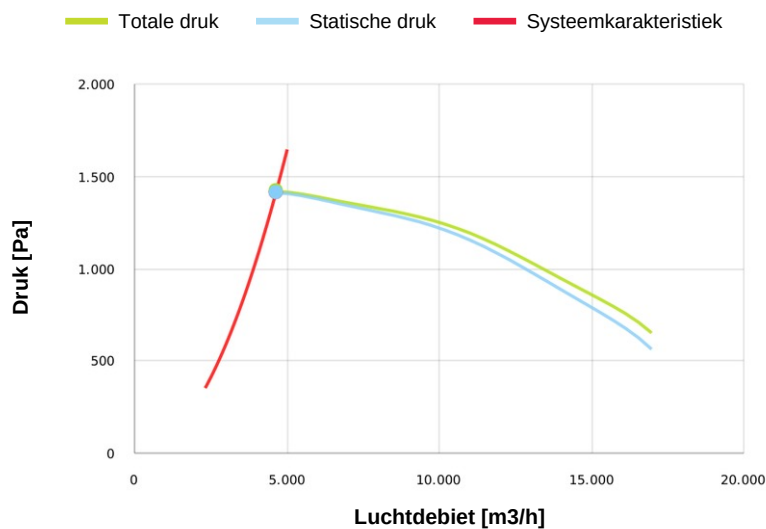


Afmetingen

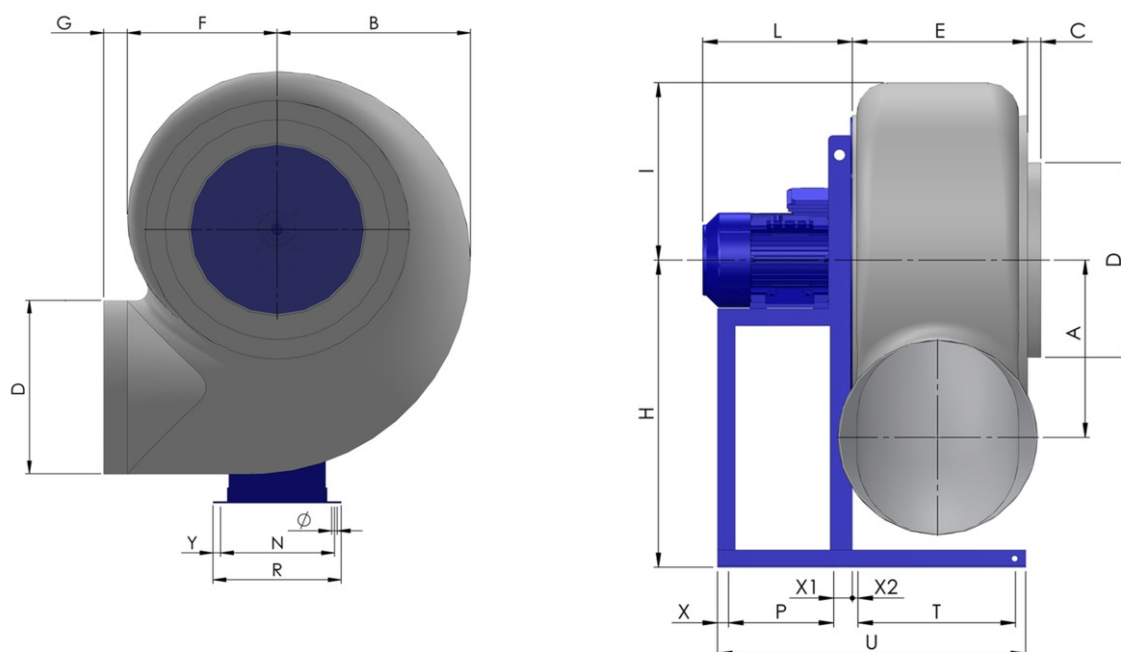

A	B	C	D	E	F	G	H	I	L	N	Ø	P	R
445	610	50	500	415	420	80	800	505	420	337	14	270	373

Configuraties & CAD

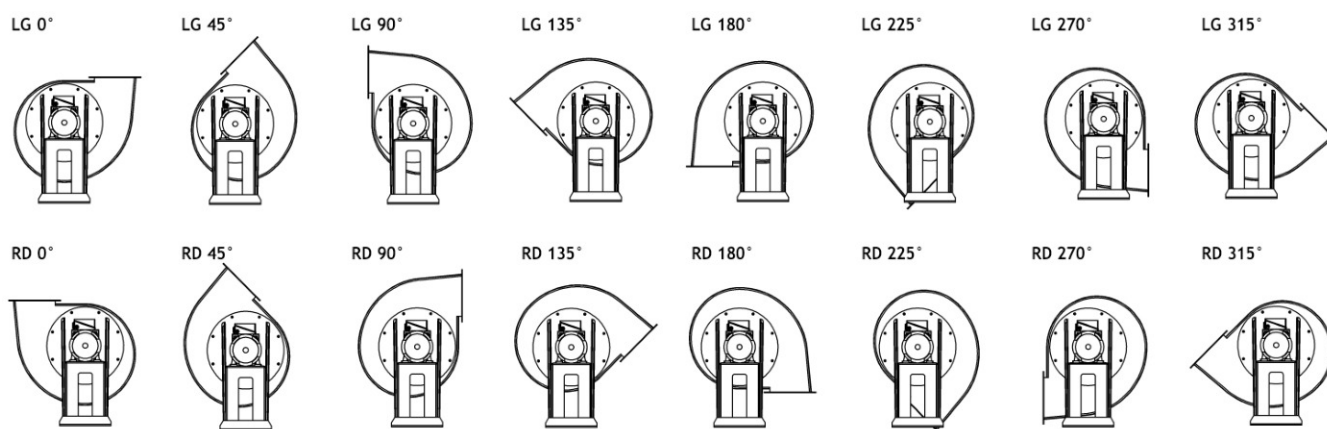

Accessoires

Bocht 90°
500mm



Deflectorkap
500mm



Flexibele verbinding
500mm



Geluidsdemper
500/700mm



Zelfsluitende klep
500mm



Handbediende regelklep
500mm



Vaste verloop
280/500mm



Vaste verloop
315/500mm



Vaste verloop
355/500mm



Vaste verloop
400/500mm



Vaste verloop
450/500mm



Vaste verloop
500/600mm





Accessoires

Vaste verloop
500/700mm



Regenkap
500mm



Uitblaaskap met gaasrooster
500mm

