

Technische gegevens


Luchtdebiet [m ³ /h]	5826
Druk [Pa]	546.6
Druktype	Psta
Voeding	all
Dichtheid [kg/m ³]	1.205

Typeplaatgegevens

Code	KR636
Spanning [V]	400
Fasen	3
Stroom [A]	5.43
Polen	6
Gewicht [kg]	102
Frequentie [Hz]	50
Toerental [rpm]	950
Vermogen [kW]	2.2
IP	55
Isolatieklasse	

Motorgegevens

IE-klasse	IE3
Grootte	112M
Vermogen [kW]	2.2
Stroom [A]	5.3
Spanning [V]	400
Cos ϕ	0.72
n (rendement)	0.843

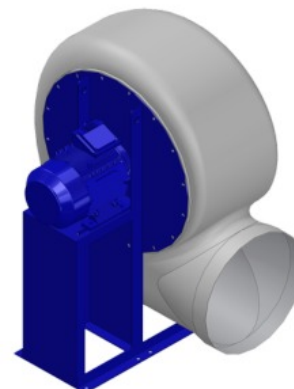






- PE gegoten huis
- PP/INOX/Fe+ebonite waaier
- Staal gecoate motorsteun
- Roestvrijstalen schroeven

Certificeringen




Werkpunt

Q [m ³ /h]	5826
P _{sta} [Pa]	546.6
P _{tot} [Pa]	557.0
P _{in} [W]	1113.
n _{sta}	0.795
n _{tot}	0.81
Toerental [rpm]	950

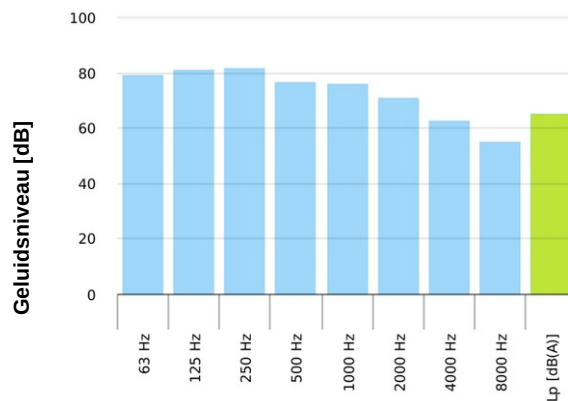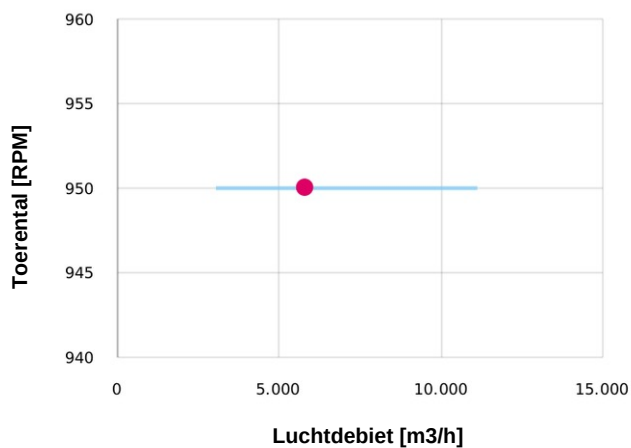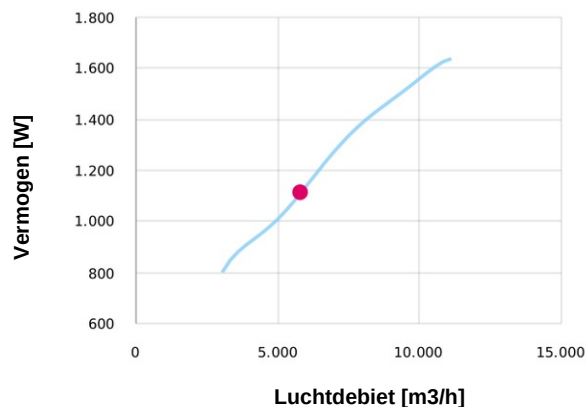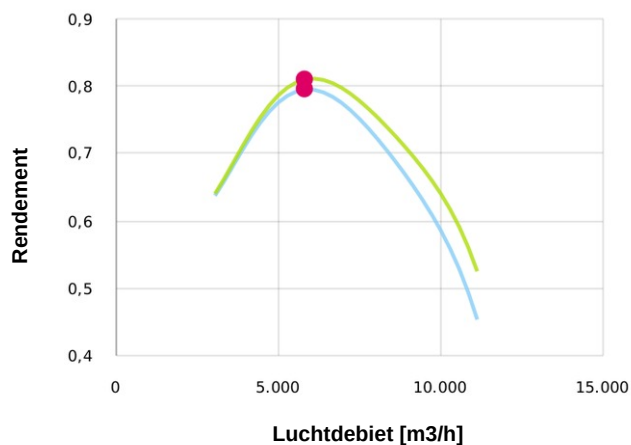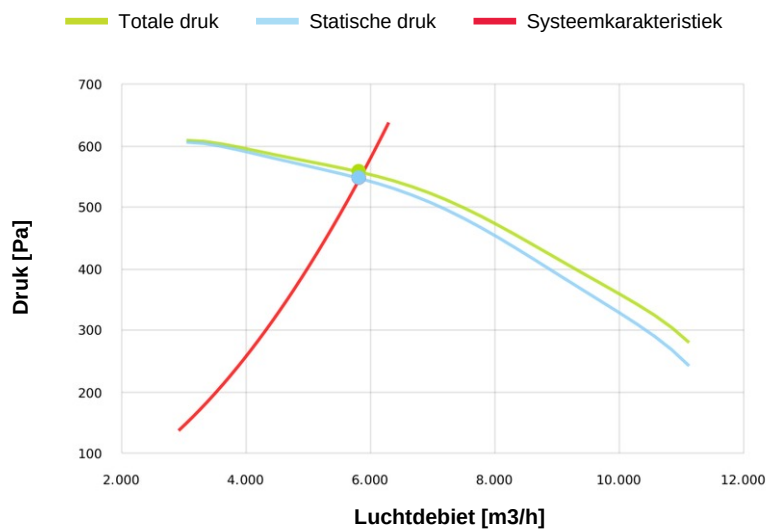


Afmetingen

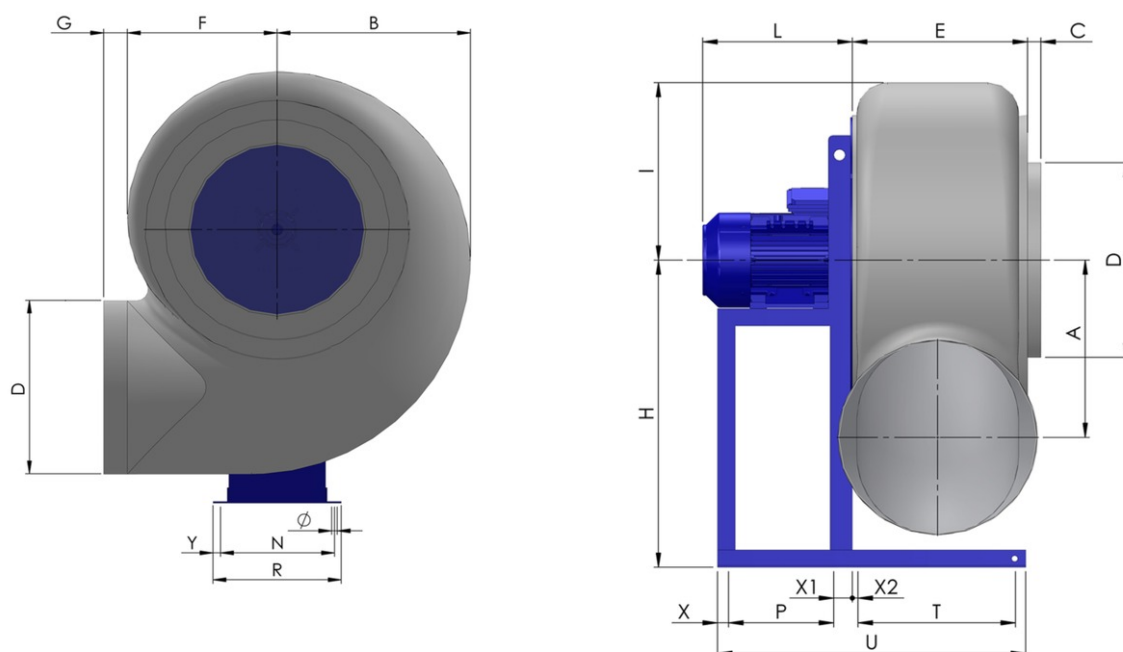

A	B	C	D	E	F	G	H	I	L	N	Ø	P	R
445	610	50	500	415	420	80	800	505	340	337	14	270	373

Configuraties & CAD

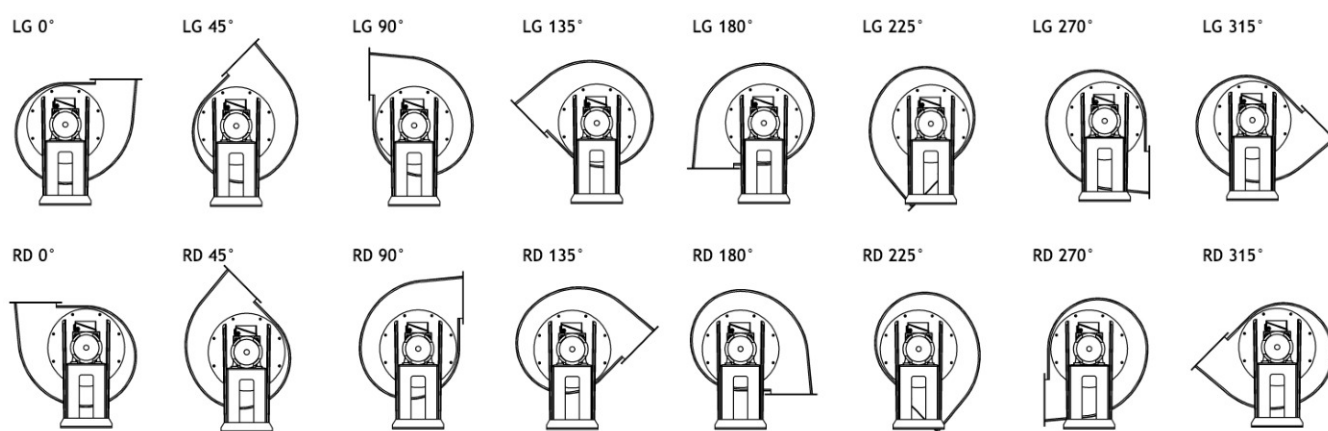

Accessoires

Bocht 90°
500mm



Deflectorkap
500mm



Flexibele verbinding
500mm



Geluidsdemper
500/700mm



Zelfsluitende klep
500mm



Handbediende regelklep
500mm



Vaste verloop
280/500mm



Vaste verloop
315/500mm



Vaste verloop
355/500mm



Vaste verloop
400/500mm



Vaste verloop
450/500mm



Vaste verloop
500/600mm





Accessoires

Vaste verloop
500/700mm



Regenkap
500mm



Uitblaaskap met gaasrooster
500mm

