

Technische gegevens


Luchtdebiet [m3/h]	21192
Druk [Pa]	2066
Druktype	Psta
Voeding	all
Dichtheid [kg/m3]	1.205

Typeplaatgegevens

Code	KR804ST
Spanning [V]	400
Fasen	3
Stroom [A]	40.6
Polen	4
Gewicht [kg]	400
Frequentie [Hz]	50
Toerental [rpm]	1450
Vermogen [kW]	22
IP	55
Isolatieklasse	

Motorgegevens

IE-klasse	IE3
Grootte	180L
Vermogen [kW]	22.0
Stroom [A]	39.7
Spanning [V]	400
Cos ϕ	0.86
n (rendement)	0.93

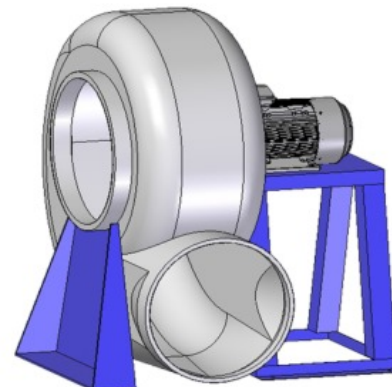






- PE gegoten huis
- PP/INOX/Fe+ebonite waaier
- Staal gecoate motorsteun
- Roestvrijstalen schroeven

Certificeringen




Werkpunt


Q [m ³ /h]	21192
P _{sta} [Pa]	2066.
P _{tot} [Pa]	2102.
P _{in} [W]	15562
n _{sta}	0.782
n _{tot}	0.796
Toerental [rpm]	1450

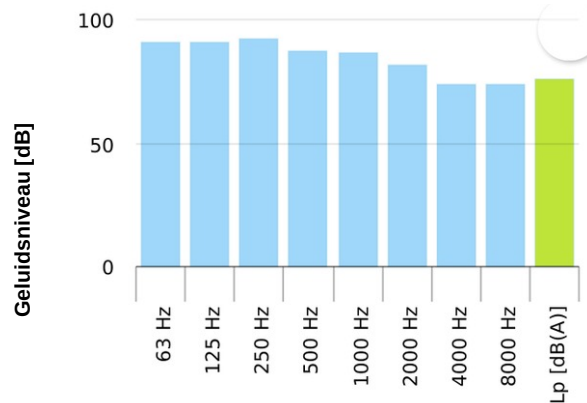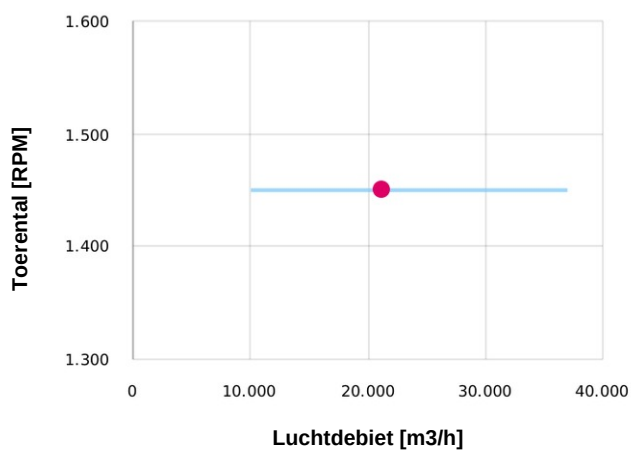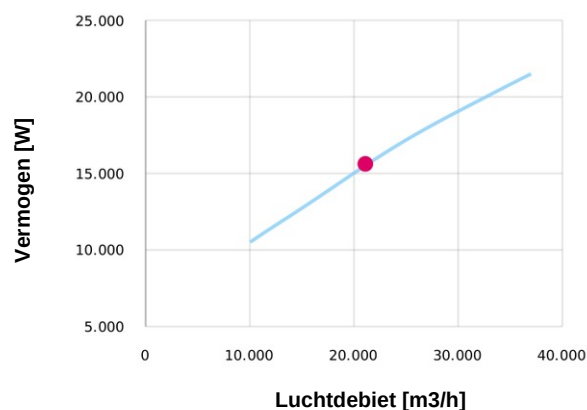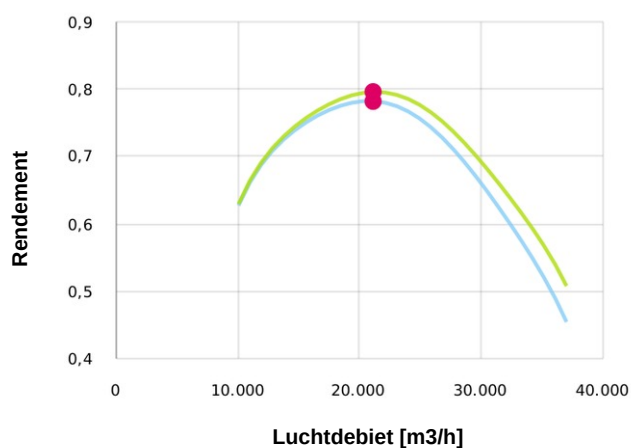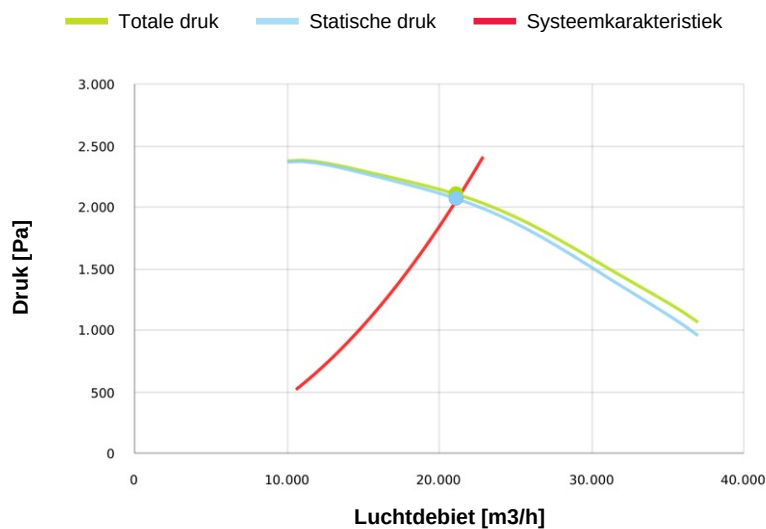

Afmetingen

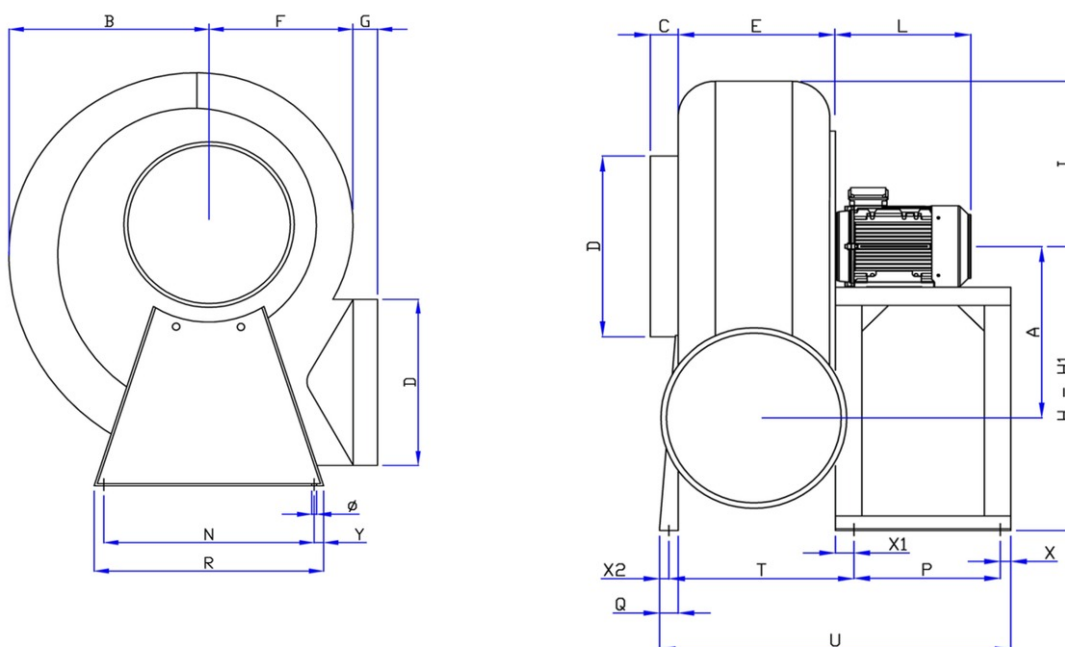

Configuraties & CAD

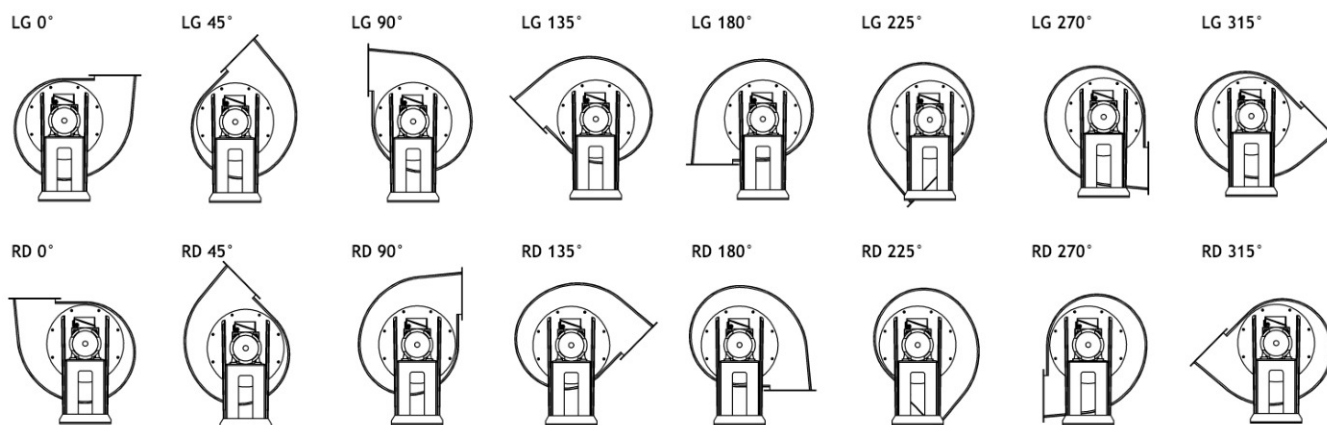

Accessoires

Bocht 90°
700mm



Deflectorkap
700mm



Flexibele verbinding
700mm



Handbediende regelklep
700mm



Vaste verloop
355/700mm



Vaste verloop
400/700mm



Vaste verloop
450/700mm



Vaste verloop
500/700mm



Vaste verloop
600/700mm



Uitblaaskap met gaasrooster
700mm

