

SC642SF3.3T-IE2 – SC642SF5.7T-IE2





Ook leverbaar in ATEX uitvoering
Also available in ATEX version



De constructie van de ringventilatoren is gebaseerd op het principe van de zijkanaal. De ventilatoren kunnen zowel als afzuig- of als compressievertilator werken en zijn ontworpen voor continu gebruik. Het apparaat wordt direct op de motoras gemonteerd. Alle draaiende delen zijn dynamisch uitgebalanceerd om absolute afwezigheid van trillingen te garanderen. Volledig gegoten aluminium constructie voor maximale stevigheid en gebruiksgemak.



Construction of the ring blowers fans is based on the lateral ducts principle. The blowers can operate as either exhaust or compression fans and are designed for continuous service. The device is assembled directly on the motor shaft. All the rotating parts are dynamically balanced to ensure absolute absence of vibration. Full die-cast aluminium construction for maximum sturdiness and ease of handling.

Curve	Model	Frequency	Output power	Voltage	Rated current	Noise	Weight
n.	n.	(Hz)	(kW)	(V)	(A)	dB (A)	(Kg)
1	SC642SF3.3T-IE2	50	3.3	230 Δ 400Y	12.0 Δ/6.9Y	67	48
2	SC642SF3.3T-IE2	60	3.8	260 Δ 460Y	11.6 Δ/6.5Y	71	48
3	SC642SF5.7T-IE2	50	5.7	400 Δ 690Y	10.9 Δ/6.3Y	68	65
4	SC642SF5.7T-IE2	60	6.6	460 Δ 720Y	10.2 Δ/5.8Y	72	65

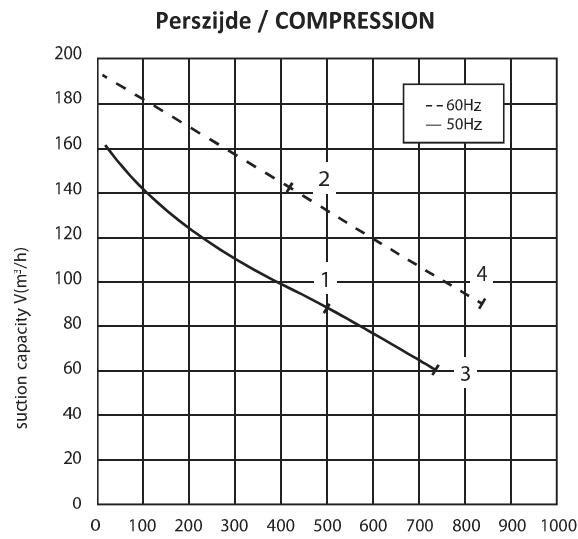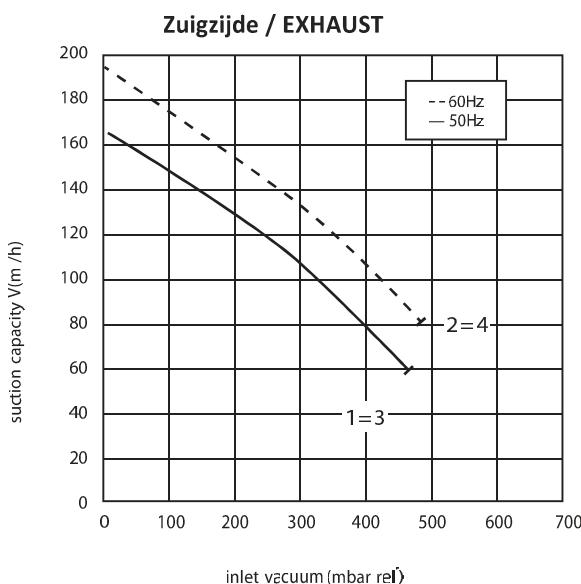

The characteristic data given here refer to the handling of gas with inlet temperature of 15° C, normal density of 1,23 kg/m³ and absolute pressure of 1.013 mbar. Tolerance of ±10%. The data may change without any notification.

Dimensions = mm

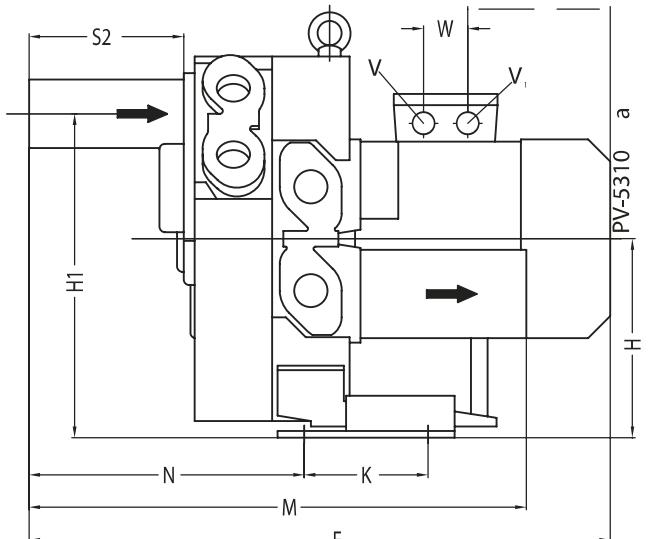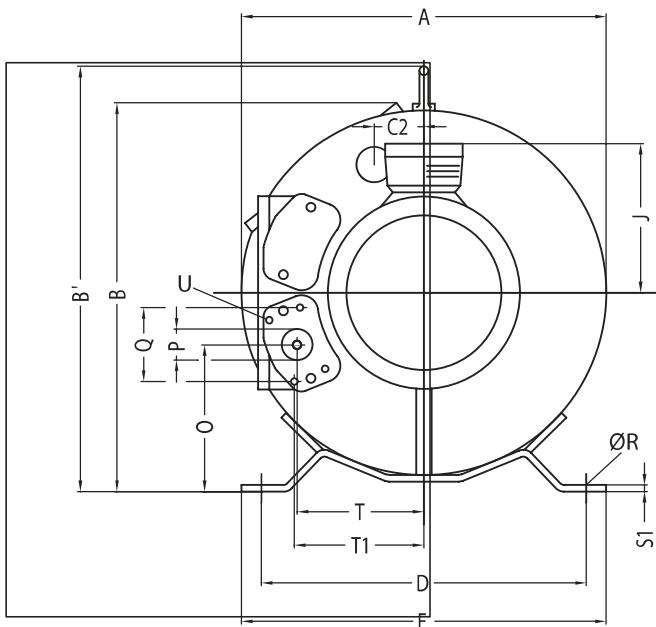

Curve	A	B	B ¹	B1	C	C2	D	E	F	G	H	H1	J	K	M	N	O	P
SC642SF3.3T-IE2	1 / 2	442	457	495	—	—	63	372	406	578	211	236	389	128	152	458	259	173 G1 ¹ / ₄
SC642SF5.7T-IE2	3 / 4	442	457	495	—	—	63	372	406	643	248	236	389	148	152	458	259	173 G1 ¹ / ₄

Curve	Q	R	S1	S2	S3	T	T1	U	V	V1	W	X	Y X Z
SC642SF3.3T-IE2	63.8	14	5	140	31	153	155	M6 x 17	M25 X 1.5	M16 x 1.5	42	-	-
SC642SF5.7T-IE2	63.8	14	5	140	31	153	155	M6 x 17	M32 X 1.5	M16 x 1.5	42	-	-