




Cartridge filter (compression)

FAT

Filters from 1" to 6" and, upon request, we design filters with flos up to 4.000 m³/h. The cartridges fitted inside the complete filters can give different types of filtration (paper, polyester, stainless steel, separator and active carbon) lending our product high level of dust collection. Each filter is tested at 100% safety standards before and after painting.

Dimensions = mm

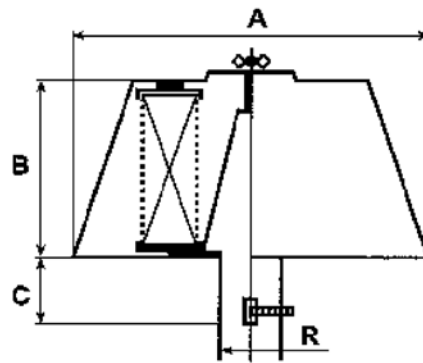

Filter with PVC
spool pipe
included

Code	Capacity (m ³ /h)	A	B	PVC spool pipe length	Spool pipe	Cartridge
FAT6030	85	153	105	130	1"G	CAFT2454
FAT6040	160	153	105	200	1"1/4G	CAFT2454
FAT6050	250	195	155	200	1"1/2G	CAFT2455
FAT6060	400	230	155	200	2"G	CAFT2456/FT
FAT7080S	630	265	180	200	2"1/2G	CAFT2457S
FAT6070	700	292	180	200	3"G	CAFT2457
FAT6080	1400	410	330	200	4"G	CAFT2458/FT

The characteristic data given here refer to the handling of gas with inlet temperature of 15° C, normal density of 1,23 kg/m³ and absolute pressure of 1.013 mbar. Tolerance of ±10%. The data may change without any notification.