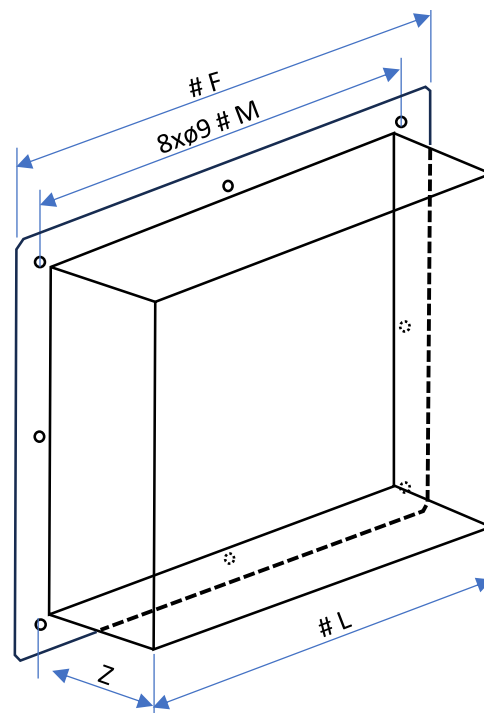
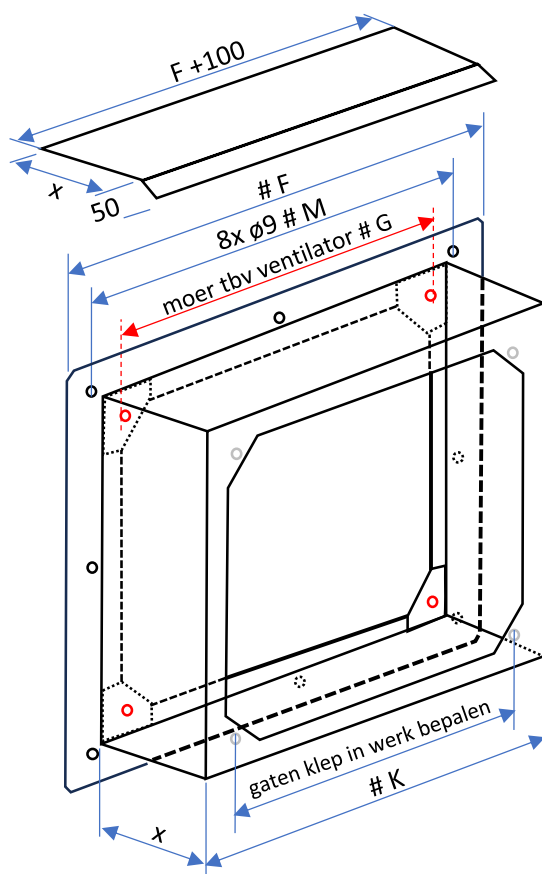


Zie voor instructie de montagehandleiding

De motor zit binnen en de ventilator blaast naar buiten

Type EC/AC	#F	#K	#L	#M	X	Z	#G t.b.v.	Klep WAK	Gaten klep
ventilatoren	uitw.	uitw.	uitw.	ø9mm	diepte	diepte	ventilator	geadviseerd	zelf boren
EC/AC200	450	385	395	420	115	100	M6	WAK 30	±240
EC/AC250	450	385	395	420	115	100	M6	WAK 30	±240
EC/AC300	550	485	495	520	115	100	M8	WAK 40	±360
EC/AC350	550	485	495	520	115	100	M8	WAK 40	±360
EC/AC400	650	585	595	620	115	100	M8	WAK 50	±460
EC/AC450	650	585	595	620	160	100	M10	WAK 50	±460
EC/AC500	740	675	685	710	160	100	M10	WAK 60	±560
EC/AC560	830	765	775	800	190	100	M10	WAK 70	±660
EC/AC630	930	865	875	900	190	100	M10	WAK 80	±760
EC/AC710	930	865	875	900	270	180	M12	WAK 80	±760
EC/AC800	1030	965	975	1000	270	180	M12	WAK 90	±860
AC910	1230	1165	1175	1220	280	180	M12	# 1150mm uitwendig	
EC1000	1230	1165	1175	1220	250	180	M12	# 1150mm uitwendig	
AC1000	1230	1165	1175	1220	320	180	M12	# 1150mm uitwendig	

Materiaal Senzimir 1,25 mm

Technische fiche voor verstelbare muurdoorvoer
voor zowel de nieuwe EC als de oude AC wandventilatoren

Date : 17-2-2024
25-11-2025

rev: 11