

## RMV 125/0.18-6D



These robustly welded plastic fans are particularly well-suited for use in aggressive atmospheric conditions in chemical factories or salty sea air.

Housings are available in PE100 (UV resistant), PP-h, PP-s, and PE-el.  
Impellers are available in PP-h, PP-s, PPs-el, PVDF, AISI A4, or steel-coated options.

### General Data


Max. air capacity	400	m <sup>3</sup> /h
Impeller speed	900	rpm
Power	0,18	kW
Electric supply	3x400/50	V/Hz
Max current	0,8	A
Enclosure	55	IP
Weight	18	kg
Max. medium temp.	20(50)	°C
Sound pressure level ±2*	46	dB(A)

\* (at 2m near the fan with inlet and outlet ducted, in free field)

### Options:

Flexible connection inlet & outlet	mipolan ø125
Anti-vibration mountings	30x20/B/40°ShA
Ex' motor	EEExe / EEExd(e)
Outlet extension 1m	
Adjustable valve in outlet	
Outlet grill	
Motor cover	
Automatic shutter	

Graph:

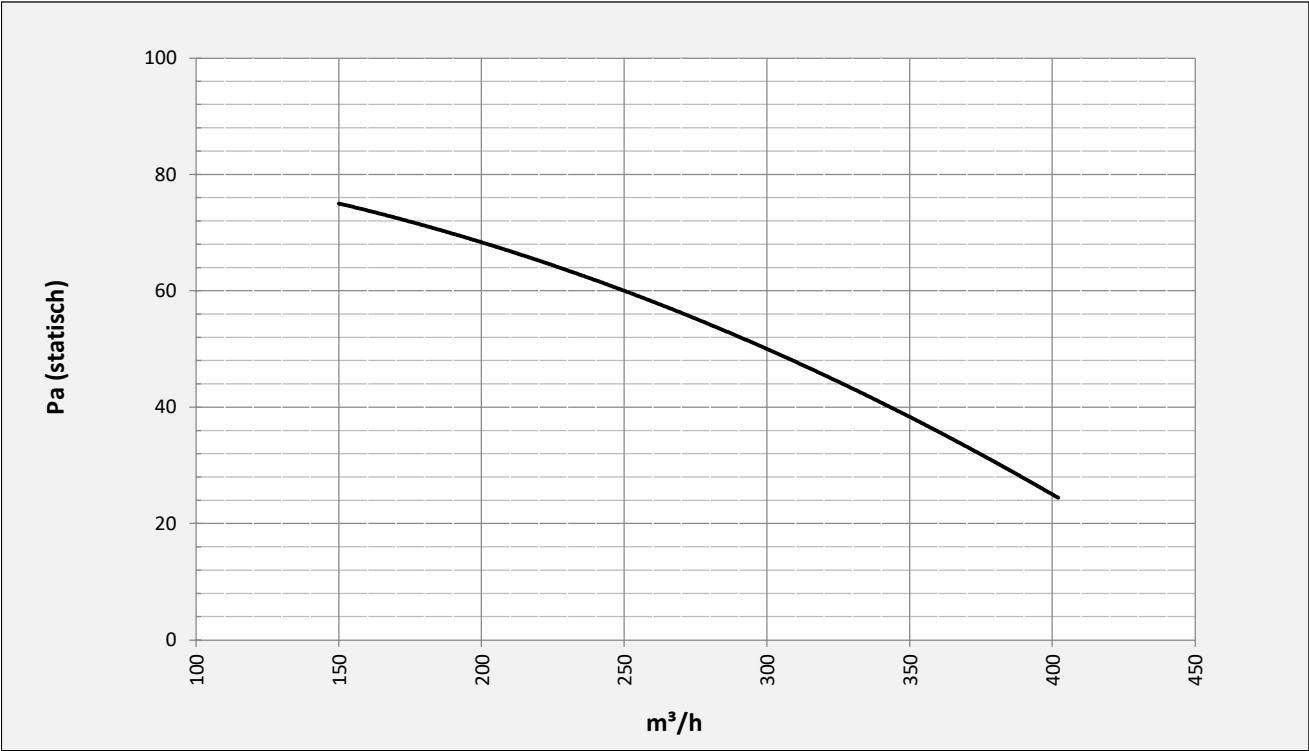

Dimensions: Outlet position RD0

