

RMV 355/0.75-6D



These robustly welded plastic fans are particularly well-suited for use in aggressive atmospheric conditions in chemical factories or salty sea air.

Housings are available in PE100 (UV resistant), PP-h, PP-s, and PE-el.

Impellers are available in PP-h, PP-s, PPs-el, PVDF, AISI A4, or steel-coated options.

General Data


Max. air capacity	4500	m3/h
Impeller speed	925	rpm
Power	0,75	kW
Electric supply	3x400/50	V/Hz
Max current	2,0	A
Enclosure	55	IP
Weight	71	kg
Max. medium temp.	20(50)	°C
Sound pressure level $\pm 2^*$	72,8	dB(A)

** (at 2m near the fan with inlet
and outlet ducted, in free field)*

Options:

Flexible connection inlet & outlet	mipolan ø355
Anti-vibration mountings	40x30/B/40°ShA
Ex' motor	EExe / EExd(e)
Outlet extension 1m	
Adjustable valve in outlet	
Outlet grill	
Motor cover	
Automatic shutter	

Graph:

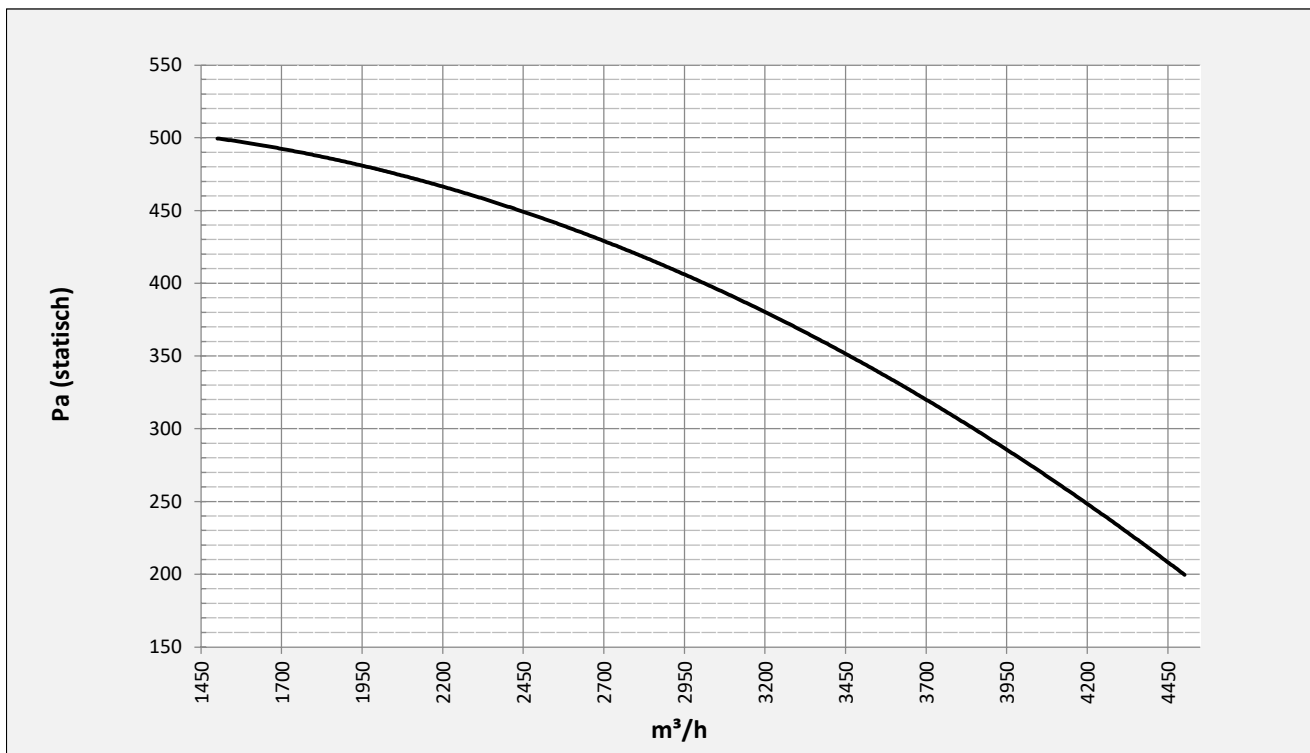

Dimensions: Outlet position RD0

