

## Technische gegevens


|                    |       |
|--------------------|-------|
| Luchtdebiet [m3/h] | 3160  |
| Druk [Pa]          | 1343  |
| Druktype           | Psta  |
| Voeding            | all   |
| Dichtheid [kg/m3]  | 1.205 |

## Typeplaatgegevens

|                 |        |
|-----------------|--------|
| Code            | TCV352 |
| Spanning [V]    | 400    |
| Fasen           | 3      |
| Stroom [A]      | 4.61   |
| Polen           | 2      |
| Gewicht [kg]    | 35     |
| Frequentie [Hz] | 50     |
| Toerental [rpm] | 2850   |
| Vermogen [kW]   | 2.2    |
| IP              | 55     |
| Isolatieklasse  |        |

## Motorgegevens

|                    |       |
|--------------------|-------|
| IE-klasse          | IE3   |
| Grootte            | 90L   |
| Vermogen [kW]      | 2.2   |
| Stroom [A]         | 4.4   |
| Spanning [V]       | 400   |
| Cos $\phi$         | 0.84  |
| $\eta$ (rendement) | 0.859 |

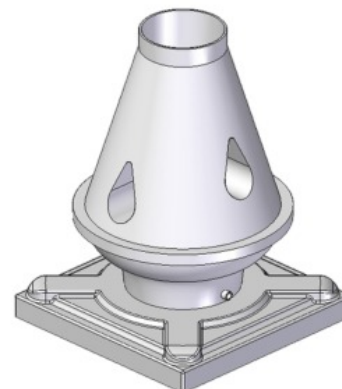






- PE gegoten huis
- PP gegoten waaier
- Roestvrijstalen schroeven

## Certificeringen




## Werkpunt

|                       |       |
|-----------------------|-------|
| Q [m <sup>3</sup> /h] | 3160  |
| P <sub>sta</sub> [Pa] | 1343. |
| P <sub>tot</sub> [Pa] | 1374. |
| P <sub>in</sub> [W]   | 1455. |
| n <sub>sta</sub>      | 0.81  |
| n <sub>tot</sub>      | 0.829 |
| Toerental [rpm]       | 2850  |

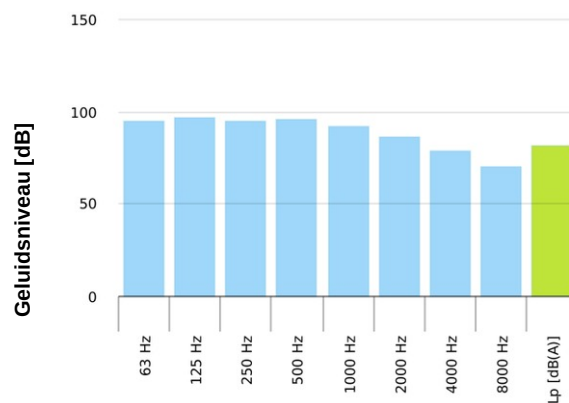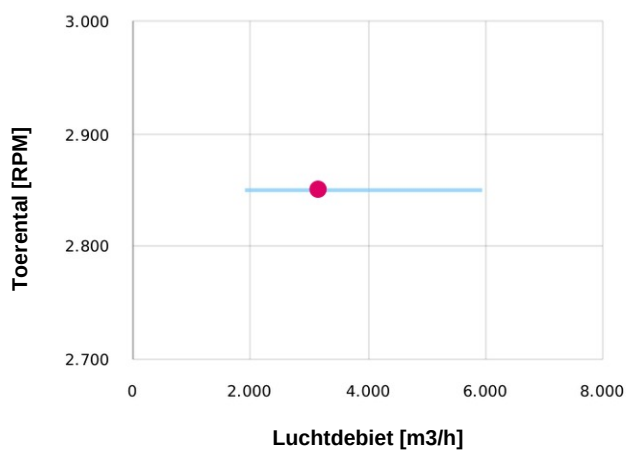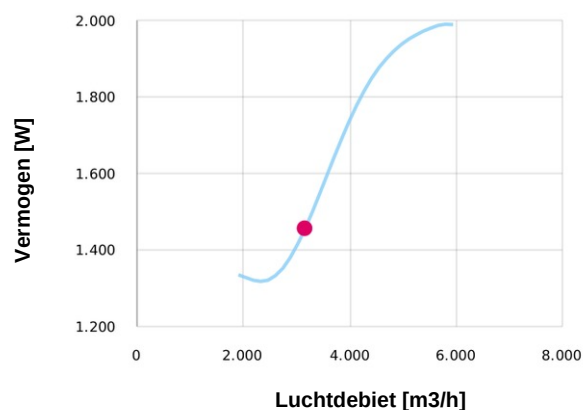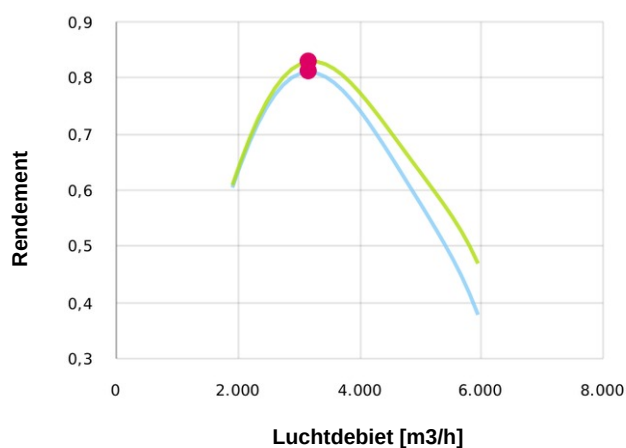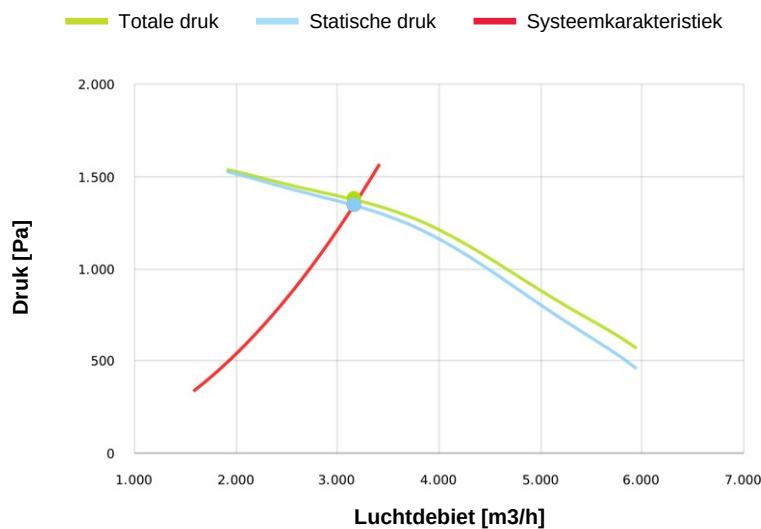


## Afmetingen

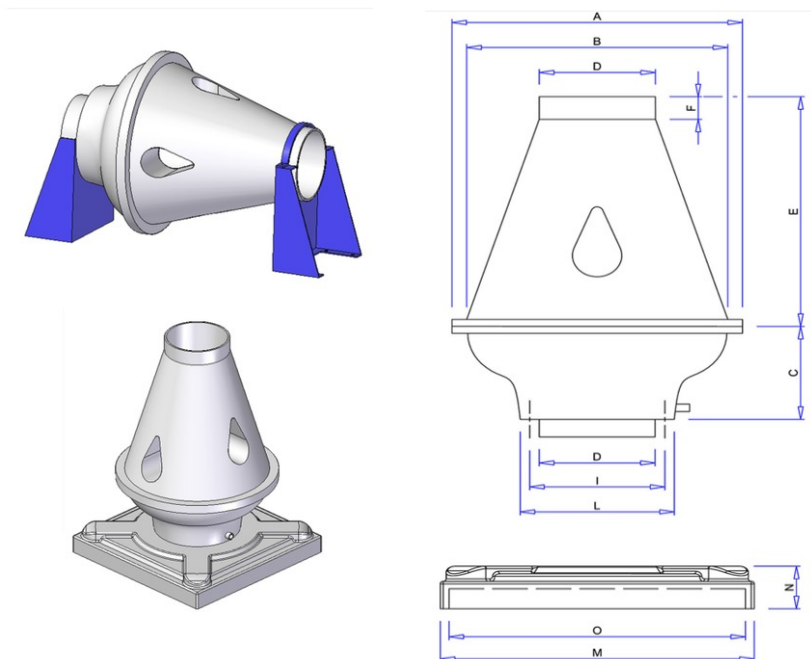

| A   | B   | C   | D   | E   | F  | I   | L   | M   | N  | N° | O   |
|-----|-----|-----|-----|-----|----|-----|-----|-----|----|----|-----|
| 600 | 560 | 240 | 280 | 600 | 50 | 325 | 365 | 540 | 80 | 8  | 490 |

## Configuraties & CAD

LG 0°



## Accessoires

**Bocht 90°**  
280mm



**Deflectorkap**  
280mm



**Flexibele verbinding**  
280mm



**Geluidsdemper**  
280/400mm



**Zelfsluitende klep**  
280mm



**Handbediende regelklep**  
280mm



**Vaste verloop**  
160/280mm



**Vaste verloop**  
180/280mm



**Vaste verloop**  
200/280mm



**Vaste verloop**  
225/280mm



**Vaste verloop**  
250/280mm



**Vaste verloop**  
280/315mm





## Accessoires

**Vaste verloop**  
280/355mm



**Vaste verloop**  
280/400mm



**Vaste verloop**  
280/450mm



**Vaste verloop**  
280/500mm



**Vaste verloop**  
80mm



**Uitblaaskap met gaasrooster**  
280mm

